

CE

Test Report

Product Name : WIRELESS-A/N 26DBM NETWORK MINI PCI
ADAPTER

Model No. : IWAVEPORT WLM200N5-26

Applicant : Compex Systems Pte Ltd

Address : 135 Joo Seng Road, #08-01 PM Industrial Building
Singapore 368363

Date of Receipt : 2008/10/30

Issued Date : 2008/12/14

Report No. : 08BS034R-RF-CE-P02V01

The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by CNLA, NVLAP, NIST or any agency of the Government.

The test report shall not be reproduced except in full without the written approval of QuieTek Corporation.

Test Report Certification

Issued Date : 2008/12/14

Report No. : 08BS034R-RF-CE-P02V01



Product Name : WIRELESS-A/N 26DBM NETWORK MINI PCI ADAPTER

Applicant : Compex Systems Pte Ltd

Address : 135 Joo Seng Road, #08-01 PM Industrial Building
Singapore 368363

Manufacturer : Compex Systems Pte Ltd

Address : 135 Joo Seng Road, #08-01 PM Industrial Building
Singapore 368363

Model No. : IWAVEPORT WLM200N5-26


EUT Voltage : DC 3.3V


Trade Name : COMPEX


Applicable Standard : ETSI EN 301 489-1 V1.6.1 (2005-09)
ETSI EN 301 489-17 V1.2.1 (2002-08)

Test Result : Complied

Performed Location : SuZhou EMC laboratory
No.99 Hongye Rd., Suzhou Industrial Park Loufeng
Hi-Tech Development Zone., SuZhou, China
TEL: +86-512-6251-5088 / FAX: +86-512-6251-5098

Documented By : 
(Any Liu)

Reviewed By : 
(Marlin Chen)

Approved By : 
(Gene Zhang)

Laboratory Information

We , **Quietek Corporation**, are an independent EMC and safety consultancy that was established the whole facility in our laboratories. The test facility has been accredited by the following accreditation Bodies in compliance with ISO 17025, EN 45001 and Guide 25:

Taiwan R.O.C.	: BSMI, DGT, CNLA
Germany	: TUV Rheinland
Norway	: Nemko, DNV
USA	: FCC, NVLAP
Japan	: VCCI

The related certificate for our laboratories about the test site and management system can be downloaded from Quietek Corporation's Web Site : <http://tw.quietek.com/modules/myalbum/>

The address and introduction of Quietek Corporation's laboratories can be founded in our Web site : <http://www.quietek.com/>

If you have any comments, Please don't hesitate to contact us. Our contact information is as below:

HsinChu Testing Laboratory :

No.75-2, 3rd Lin, Wangye Keng, Yonghxing Tsuen, Qionglin Shiang, Hsinchu County 307, Taiwan, R.O.C.

TEL:+886-3-592-8858 / FAX:+886-3-592-8859 E-Mail : service@quietek.com



LinKou Testing Laboratory :

No. 5, Ruei-Shu Valley, Ruei-Ping Tsuen, Lin-Kou Shiang, Taipei, Taiwan, R.O.C.

TEL : +886-2-8601-3788 / FAX : 886-2-8601-3789 E-Mail : service@quietek.com



Suzhou Testing Laboratory :

No.99 Hongye Rd., Suzhou Industrial Park Loufeng Hi-Tech Development Zone., SuZhou, China

TEL : +86-512-6251-5088 / FAX : 86-512-6251-5098 E-Mail : service@quietek.com



TABLE OF CONTENTS

Description	Page
1. General Information	8
1.1. EUT Description.....	8
1.2. Mode of Operation	9
1.3. Tested System Details	10
1.4. Configuration of Tested System	11
1.5. EUT Exercise Software	12
2. Technical Test	13
2.1. Summary of Test Result.....	13
2.2. List of Test Equipment	14
2.3. Measurement Uncertainty.....	17
2.4. Test Environment	19
2.5. Performance criteria	21
3. Conducted Emission (AC input/output Ports).....	24
3.1. Test Specification	24
3.2. Test Setup.....	24
3.3. Limit.....	24
3.4. Test Procedure	25
3.5. Deviation from Test Standard	25
3.6. Test Result.....	26
3.7. Test Photograph	32
4. Conducted Emission (DC input/output Ports)	33
4.1. Test Specification	33
4.2. Test Setup.....	33
4.3. Limit.....	33
4.4. Test Procedure	34
4.5. Deviation from Test Standard	34
4.6. Test Result.....	34
5. Conducted Emissions (Telecommunication Ports).....	35
5.1. Test Specification	35
5.2. Test Setup.....	35
5.3. Limit.....	35
5.4. Test Procedure	36
5.5. Deviation from Test Standard	36
5.6. Test Result.....	37
5.7. Test Photograph	43
6. Radiated Emission	44

6.1.	Test Specification	44
6.2.	Test Setup.....	44
6.3.	Limit.....	44
6.4.	Test Procedure	45
6.5.	Deviation from Test Standard	45
6.6.	Test Result.....	46
6.7.	Test Photograph	48
7.	Harmonic Current Emission	49
7.1.	Test Specification	49
7.2.	Test Setup.....	49
7.3.	Limit.....	49
7.4.	Test Procedure	51
7.5.	Deviation from Test Standard	51
7.6.	Test Result.....	52
7.7.	Test Photograph	54
8.	Voltage Fluctuation and Flicker	55
8.1.	Test Specification	55
8.2.	Test Setup.....	55
8.3.	Limit.....	55
8.4.	Test Procedure	56
8.5.	Deviation from Test Standard	56
8.6.	Test Result.....	57
8.7.	Test Photograph	58
9.	Electrostatic Discharge	59
9.1.	Test Specification	59
9.2.	Test Setup.....	59
9.3.	Limit.....	59
9.4.	Test Procedure	60
9.5.	Deviation from Test Standard	60
9.6.	Test Result.....	61
9.7.	Test Photograph	63
10.	RF Electromagnetic Field	64
10.1.	Test Specification.....	64
10.2.	Test Setup	64
10.3.	Limit.....	64
10.4.	Test Procedure	65
10.5.	Deviation from Test Standard	65
10.6.	Test Result.....	66

10.7. Test Photograph	68
11. Fast Transients Common Mode	69
11.1. Test Specification	69
11.2. Test Setup.....	69
11.3. Limit.....	69
11.4. Test Procedure.....	70
11.5. Deviation from Test Standard	70
11.6. Test Result.....	71
11.7. Test Photograph.....	73
12. Surges.....	75
12.1. Test Specification.....	75
12.2. Test Setup	75
12.3. Limit.....	75
12.4. Test Procedure	76
12.5. Deviation from Test Standard	76
12.6. Test Result.....	77
12.7. Test Photograph	79
13. RF Common Mode.....	80
13.1. Test Specification.....	80
13.2. Test Setup	80
13.3. Limit.....	81
13.4. Test Procedure	81
13.5. Deviation from Test Standard	82
13.6. Test Result.....	83
13.7. Test Photograph	85
14. Voltage Dips and Interruption	87
14.1. Test Specification.....	87
14.2. Test Setup	87
14.3. Limit.....	87
14.4. Test Procedure	88
14.5. Deviation from Test Standard	88
14.6. Test Result.....	89
14.7. Test Photograph	93
15. Transients and surges.....	94
15.1. Test Specification.....	94
15.2. Test Setup	94
15.3. Limit.....	94
15.4. Test Procedure	94

15.5. Deviation from Test Standard95

15.6. Test Result.....95

16. Attachment96

 EUT Photograph.....96

1. General Information

1.1. EUT Description

Product Name	WIRELESS-A/N 26DBM NETWORK MINI PCI ADAPTER
Trade Name	COMPEX
Model No.	IWAVEPORT WLM200N5-26
Working Voltage	DC 3.3V
Type of Modulation	802.11a/n: OFDM
Data Rate	802.11a/n: up to 135 Mbps
Antenna Type	Dipole

1.2. Mode of Operation

Quietek has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:


Test Mode	
EMI	Mode 1: Communication by WLAN
EMS	Mode 1: Communication by WLAN Mode 2: Standby

1.3. Tested System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product		Manufacturer	Model No.	Serial No.	Power Cord
1	Router Frame	Compex	B-543W	N/A	N/A
2	Adapter	DVE	BSW0134	N/A	N/A
3	Notebook	DELL	PP19L	JH097 A01	Power by adapter
4	MacBook	Apple	MB061CH	W8732B4TZ5V	Power by adapter

1.4. Configuration of Tested System

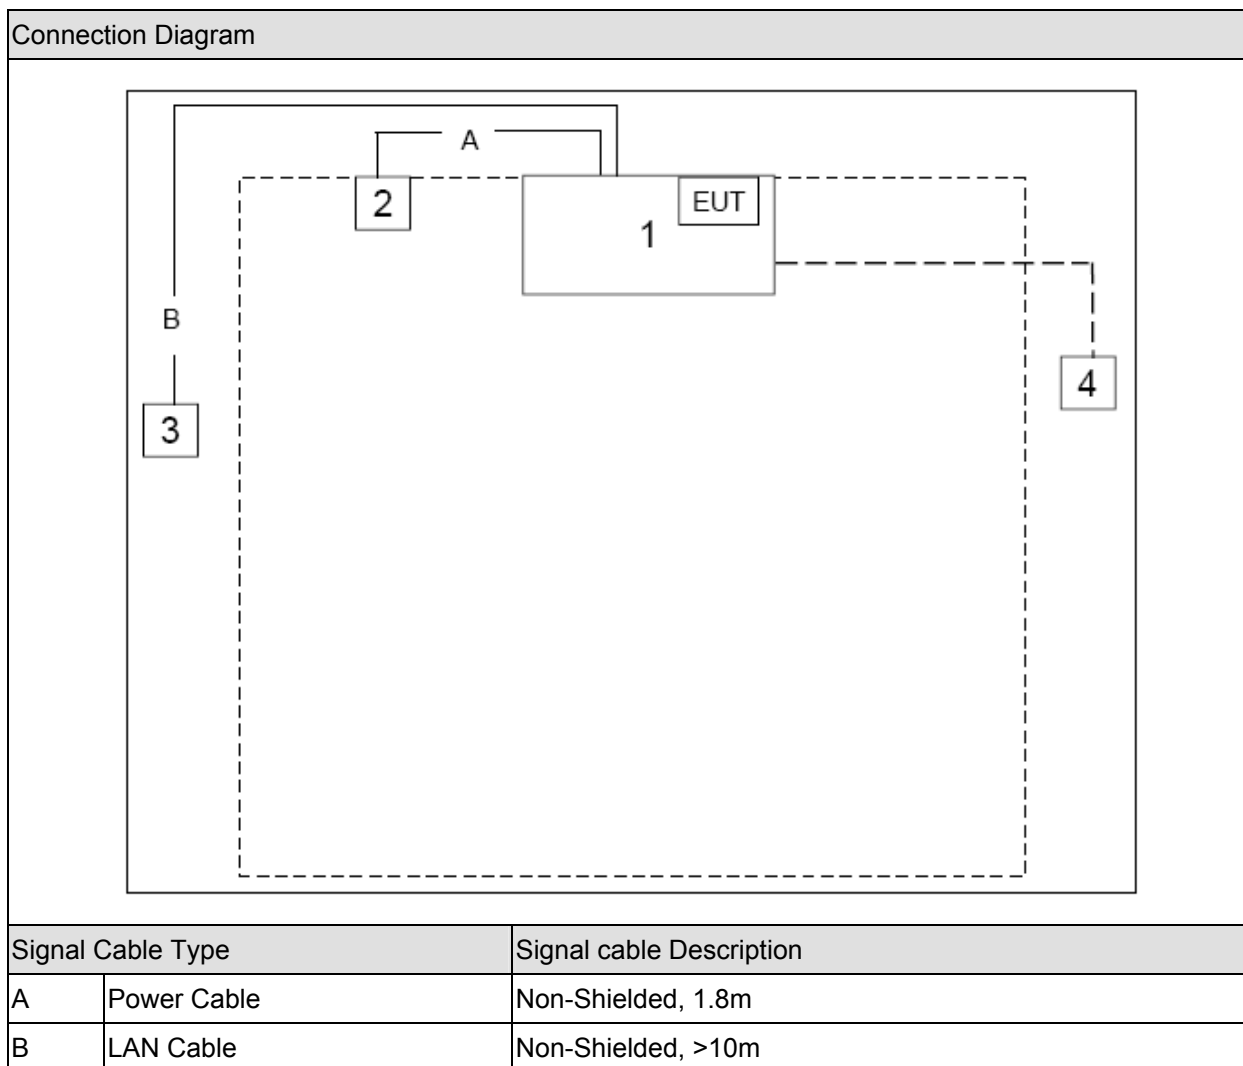

1.5. EUT Exercise Software

1	Setup the EUT and simulators as shown on above.
2	Turn on the power of all equipment.
3	Execute the "Ping" function, then select test mode and test channel, press OK to communication with another Notebook P.C. by wireless.

2. Technical Test

2.1. Summary of Test Result

- ☒ No deviations from the test standards
- ☐ Deviations from the test standards as below description:

Emission			
Performed Test Item	Normative References	Test Performed	Deviation
Conducted Emission (AC input/output Ports)	EN 55022: 2006 Class B	Yes	No
Conducted Emissions (DC input/output Ports)	EN 55022: 2006 Class B CISPR 25: 2002	N/A	N/A
Conducted Emissions (Telecommunication Ports)	EN 55022: 2006 Class B	Yes	No
Radiated Emission	EN 55022: 2006 Class B	Yes	No
Harmonic Current Emission	EN 61000-3-2: 2006	Yes	No
Voltage Fluctuations and Flicker	EN 61000-3-3: 1995+A1: 2001+A2: 2005	Yes	No

Immunity			
Performed Test Item	Normative References	Test Performed	Deviation
Electrostatic Discharge	EN 61000-4-2: 1995+A1: 1998+A2: 2001	N/A	N/A
RF Electromagnetic Field	EN 61000-4-3: 2006	Yes	No
Fast Transients Common Mode	EN 61000-4-4: 2004	Yes	No
Surges	EN 61000-4-5: 2006	Yes	No
RF Common Mode	EN 61000-4-6: 2007	Yes	No
Voltage Dips and Interruption	EN 61000-4-11: 2004	Yes	No
Transients and Surges	ISO 7637-2: 2004	N/A	N/A

2.2. List of Test Equipment

Conducted Emission / SR-1

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
EMI Test Receiver	R&S	ESCI	100726	2008/06/28
Two-Line V-Network	R&S	ENV216	100013	2008/06/28
Two-Line V-Network	R&S	ENV216	100014	2008/06/28
V-Network	R&S	ESH3-Z6	100248	2008/06/28
V-Network	R&S	ESH3-Z6	100249	2008/06/28
ISN	Schaffner	ISN T400	21648	2008/11/15
Balanced Telecom ISN	Fischer	FCC-TLISN-T2-02	20352	2008/03/02
Balanced Telecom ISN	Fischer	FCC-TLISN-T4-02	20353	2008/03/02
Balanced Telecom ISN	Fischer	FCC-TLISN-T8-02	20354	2008/03/02
Current Probe	R&S	EZ-17	100255	2008/04/18
50ohm Coaxial Switch	Anritsu	MP59B	6200464462	2008/11/24
50ohm Termination	SHX	TF2	07081401	2008/09/28
50ohm Termination	SHX	TF2	07081402	2008/09/28
50ohm Termination	SHX	TF2	07081403	2008/09/28
Coaxial Cable	Luthi	RG214	519358	2008/11/24
Temperature/Humidity Meter	zhicheng	ZC1-2	QT-TH004	2008/03/31

Radiated Emission / AC-1

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
Spectrum Analyzer	Agilent	E4403B	MY45102715	N/A
Spectrum Analyzer	Agilent	E4403B	MY45102798	N/A
EMI Test Receiver	R&S	ESCI	100175	2008/11/15
Preamplifier	Quietek	AP-025C	QT-AP001	2008/11/21
Preamplifier	Quietek	AP-025C	QT-AP002	2008/11/21
Bilog Type Antenna	Schaffner	CBL6112B	2933	2008/11/21
Bilog Type Antenna	Schaffner	CBL6112B	2931	2008/11/24
50ohm Coaxial Switch	Anritsu	MP59B	6200447303	2008/11/24
50ohm Coaxial Switch	Anritsu	MP59B	6200464461	2008/11/24
50ohm Coaxial Switch	Anritsu	MP59B	6200447305	2008/11/24
Coaxial Cable	Huber+Suhner	AC1-L	01	2008/11/24
Coaxial Cable	Huber+Suhner	AC1-R	02	2008/11/24
Coaxial Cable	Huber+Suhner	AC1-C	03	2008/11/24
Temperature/Humidity Meter	zhicheng	ZC1-2	QT-TH001	2008/03/31

Radiated Emission / AC-2

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
Spectrum Analyzer	Agilent	E4408B	MY45102679	2008/06/28
EMI Test Receiver	R&S	ESCI	100573	2008/05/10
Preamplifier	Quietek	AP-025C	QT-AP003	2008/11/24
Preamplifier	Quietek	AP-180C	CHM-0602012	2008/11/24
Bilog Type Antenna	Schaffner	CBL6112B	2932	2008/11/24
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	496	2008/11/24
50ohm Coaxial Switch	Anritsu	MP59B	6200447304	2008/11/24
Coaxial Cable	Huber+Suhner	AC2-C	04	2008/11/24
Temperature/Humidity Meter	zhicheng	ZC1-2	QT-TH002	2008/03/31

Radiated Emission / AC-3

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2008/04/24
EMI Test Receiver	R&S	ESCI	100176	2008/11/15
Preamplifier	Quietek	AP-025C	QT-AP004	2008/11/24
Preamplifier	Quietek	AP-180C	CHM-0602012	2008/11/24
Bilog Type Antenna	Schaffner	CBL6112D	22254	2008/11/24
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	496	2008/11/24
50ohm Coaxial Switch	Anritsu	MP59B	6200464463	2008/11/24
Coaxial Cable	Huber+Suhner	AC3-C	05	2008/11/24
Temperature/Humidity Meter	zhicheng	ZC1-2	QT-TH003	2008/03/31

Harmonic Current Emission / SR-1

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
AC Power Source	California	5001iX-208	56741	2008/11/29
Power Analyzer	California	PACS-1	72419	2008/11/29
Temperature/Humidity Meter	zhicheng	ZC1-2	QT-TH004	2008/03/31

Voltage Fluctuation and Flicker / SR-1

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
AC Power Source	California	5001iX-208	56741	2008/11/29
Power Analyzer	California	PACS-1	72419	2008/11/29
Temperature/Humidity Meter	zhicheng	ZC1-2	QT-TH004	2008/03/31

Electrostatic Discharge / SR-3

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
ESD Simulator	KeyTek	MZ-15/EC	0511209	2008/11/01
ESD Simulator	EM TEST	dito	V0616101367	2008/08/08
Barometer	Fengyun	DYM3	0506048	2008/11/29
Temperature/Humidity Meter	zhicheng	ZC1-2	QT-TH006	2008/03/31

RF Electromagnetic Field / AC-4

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
Signal Generator	R&S	SML03	102324	2008/10/21
Power Meter	Boonton	4231A	144502	2008/10/21
Power Sensor	Boonton	51011-EMC	33859	2008/10/21
RF Switch Network	Schaffner	RFS N100	21799	N/A
Power Amplifier	Schaffner	CBA9428	43516	N/A
Power Amplifier	Schaffner	CBA9413B	43526	N/A
Directional Coupler	A&R	DC7144A	312249	N/A
Directional Coupler	Schaffner	CHA 9652B	0121	N/A
Electric Field Probe Type 8.3	narda	2244/90.21	AZ-0030	2008/07/30
Electromagnetic Radiation Meter	narda	2244/70	AW-0074	2008/07/30
Bilog Type Antenna	Schaffner	CBL6141A	4278	N/A
Horn Antenna	A&R	AT4002A	312312	N/A
Temperature/Humidity Meter	zhicheng	ZC1-2	QT-TH007	2008/03/09

Fast Transients Common Mode / SR-2

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
Immunity Test System	KeyTek	EMCpro	508273	2008/05/10
CCL	KeyTek	CCL	0510181	2008/05/10
Temperature/Humidity Meter	zhicheng	ZC1-2	QT-TH005	2008/03/31

Surges / SR-2

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
Immunity Test System	KeyTek	EMCpro	508273	2008/05/10
Coupler/Decoupler Telecom line	KeyTek	CM-TELCD	0506277	N/A
Coupler/Decoupler Signal line	KeyTek	CM-I/OCD	0508206	N/A
Temperature/Humidity Meter	zhicheng	ZC1-2	QT-TH005	2008/03/31

RF Common Mode / SR-2

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
RF-Generator	Schaffner	NSG2070	1120	2008/11/12
Attenuator	Schaffner	INA2070-1	2120	2008/11/12
CDN	Schaffner	CDN M016	21249	2008/11/12
CDN	Teseq GmbH	CDN M016	24484	2008/09/03
CDN	Schaffner	CDN T400	19083	2008/11/12
CDN	Teseq GmbH	CDN T400	22461	2008/09/03
EM Clamp	Schaffner	KEMZ 801	21041	2008/11/12
50ohm Termination	SHX	TF2	07081404	2008/09/28
50ohm Termination	SHX	TF2	07081405	2008/09/28
50ohm Termination	SHX	TF2	07081406	2008/09/28
Temperature/Humidity Meter	zhicheng	ZC1-2	QT-TH005	2008/03/31

Voltage Dips and Interruption / SR-2

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
Immunity Test System	KeyTek	EMCpro	508273	2008/05/10
Temperature/Humidity Meter	zhicheng	ZC1-2	QT-TH005	2008/03/31

*Transients and Surges / No.4 Shielded Rom

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
Transient Generator	Schaffner	MT5510-750-0034	67	2008/10/01
Burst Generator	Schaffner	FT5530-70-0033r01	74	2008/10/01
Load Dump Generator	Schaffner	LD5505-750-0045r01	35	2008/10/01
Impedance Generator	Schaffner	RM5505-750-057r01	14	2008/10/01
Power Amplifier Generator	Schaffner	PA5840-75	/ 581-0005	2008/10/01
Function/Wave Generator	Schaffner	FG5620-750-0051-00	35	2008/10/01

Note: "*" means this test is performed in HsinChu Testing Laboratory.

2.3. Measurement Uncertainty

Conducted Emission

The measurement uncertainty is evaluated as ± 2.26 dB.

Radiated Emission

The measurement uncertainty is evaluated as ± 3.19 dB.

Harmonic Current Emission

The measurement uncertainty is evaluated as ± 1.2 %.

Voltage Fluctuations and Flicker

The measurement uncertainty is evaluated as ± 1.5 %.

Electrostatic Discharge

As what is concluded in the document from Note2 of clause 5.4.6.2 of ISO/IEC 17025: 1999[2], the requirements for measurement uncertainty in ESD testing are deemed to have been satisfied, and the testing is reported in accordance with the relevant ESD standards. The immunity test signal from the ESD system meet the required specifications in IEC 61000-4-2 through the calibration report with the calibrated uncertainty for the waveform of voltage and timing as being 1.63% and 2.76%.

RF Electromagnetic Field

As what is concluded in the document from Note2 of clause 5.4.6.2 of ISO/IEC 17025: 1999[2], the requirements for measurement uncertainty in RS testing are deemed to have been satisfied, and the testing is reported in accordance with the relevant RS standards. The immunity test signal from the RS system meet the required specifications in IEC 61000-4-3 through the calibration for the uniform field strength and monitoring for the test level with the uncertainty evaluation report for the electrical field strength as being 2.72 dB.

Fast Transients Common Mode

As what is concluded in the document from Note2 of clause 5.4.6.2 of ISO/IEC 17025: 1999[2], the requirements for measurement uncertainty in EFT/Burst testing are deemed to have been satisfied, and the testing is reported in accordance with the relevant EFT/Burst standards. The immunity test signal from the EFT/Burst system meet the required specifications in IEC 61000-4-4 through the calibration report with the calibrated uncertainty for the waveform of voltage. Frequency and timing as being 1.63% and 2.76%.

Surges

As what is concluded in the document from Note2 of clause 5.4.6.2 of ISO/IEC 17025: 1999[2], the requirements for measurement uncertainty in Surge testing are deemed to have been satisfied, and the testing is reported in accordance with the relevant Surge standards. The immunity test signal from the Surge system meet the required specifications in IEC 61000-4-5 through the calibration report with the calibrated uncertainty for the waveform of voltage and timing as being 1.63% and 2.76%.

RF Common Mode

As what is concluded in the document from Note2 of clause 5.4.6.2 of ISO/IEC 17025: 1999[2], the requirements for measurement uncertainty in CS testing are deemed to have been satisfied, and the testing is reported in accordance with the relevant CS standards. The immunity test signal from the CS system meet the required specifications in IEC 61000-4-6 through the calibration for unmodulated signal and monitoring for the test level with the uncertainty evaluation report for the injected modulated signal level through CDN and EM Clamp/Direct Injection as being 3.72 dB and 2.78 dB.

Voltage Dips and Interruption

As what is concluded in the document from Note2 of clause 5.4.6.2 of ISO/IEC 17025: 1999[2], the requirements for measurement uncertainty in DIP testing are deemed to have been satisfied, and the testing is reported in accordance with the relevant DIP standards. The immunity test signal from the DIP system meet the required specifications in IEC 61000-4-11 through the calibration report with the calibrated uncertainty for the waveform of voltage and timing as being 1.63% and 2.76%.

Transients and Surges

As what is concluded in the document from Note2 of clause 5.4.6.2 of ISO/IEC 17025: 1999[2], the requirements for measurement uncertainty in Transients and Surges testing are deemed to have been satisfied, and the testing is reported in accordance with the relevant DIP standards. The immunity test signal from the Transients and Surges system meet the required specifications in ISO 7637-2 through the calibration report with the calibrated uncertainty for the waveform of voltage and timing as being 1.60% and 2.60%.

2.4. Test Environment

Performed Item	Items	Required	Actual
Conducted Emission	Temperature (°C)	15-35	25
	Humidity (%RH)	25-75	56
	Barometric pressure (mbar)	860-1060	950-1000
Radiated Emission	Temperature (°C)	15-35	25
	Humidity (%RH)	25-75	56
	Barometric pressure (mbar)	860-1060	950-1000
Harmonic Current Emission	Temperature (°C)	15-35	25
	Humidity (%RH)	25-75	56
	Barometric pressure (mbar)	860-1060	950-1000
Voltage Fluctuations and Flicker	Temperature (°C)	15-35	25
	Humidity (%RH)	25-75	56
	Barometric pressure (mbar)	860-1060	950-1000
Electrostatic Discharge	Temperature (°C)	15-35	25
	Humidity (%RH)	30-60	56
	Barometric pressure (mbar)	860-1060	950-1000
RF Electromagnetic Field	Temperature (°C)	15-35	25
	Humidity (%RH)	25-75	56
	Barometric pressure (mbar)	860-1060	950-1000
Fast Transients Common Mode	Temperature (°C)	15-35	25
	Humidity (%RH)	25-75	56
	Barometric pressure (mbar)	860-1060	950-1000
Surges	Temperature (°C)	15-35	25
	Humidity (%RH)	10-75	56
	Barometric pressure (mbar)	860-1060	950-1000
RF Common Mode	Temperature (°C)	15-35	25
	Humidity (%RH)	25-75	56
	Barometric pressure (mbar)	860-1060	950-1000
Voltage Dips and Interruption	Temperature (°C)	15-35	25
	Humidity (%RH)	25-75	56
	Barometric pressure (mbar)	860-1060	950-1000

Transients and Surges	Temperature (°C)	15-35	--
	Humidity (%RH)	25-75	--
	Barometric pressure (mbar)	860-1060	--

2.5. Performance criteria

The performance criteria criteria are used to take a decision on whether a radio equipment passes or fails immunity tests.

For the purpose of the present document four categories of performance criteria apply:

- performance criteria for continuous phenomena applied to transmitters;
- performance criteria for transient phenomena applied to transmitters;
- performance criteria for continuous phenomena applied to receivers;
- performance criteria for transient phenomena applied to receivers.

Normally, the performance criteria depend on the type of radio equipment. Thus, the present document only contains general performance criteria commonly used for the assessment of radio equipment. More specific and product-related performance criteria for a dedicated type of radio equipment may be found in the part of EN 301 489 series [22] dealing with the particular type of radio equipment.

(1) Performance criteria for continuous phenomena applied to transmitters and receivers

If no further details are given in the relevant part of EN 301 489 series [22] dealing with the particular type of radio equipment, the following general performance criteria for continuous phenomena shall apply.

During and after the test, the apparatus shall continue to operate as intended. No degradation of performance or loss of function is allowed a permissible performance level specified by the manufacturer when the apparatus is used as intended. In some cases this permissible performance level may be replaced by a permissible loss of performance.

During the test the EUT shall not unintentionally transmit or change its actual operating state and stored data.

If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be deduced from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.

(2) Performance criteria for transient phenomena applied to transmitters and receivers

If no further details are given in the relevant part of EN 301 489 series [22] dealing with the particular type of radio equipment, the following general performance criteria for transient phenomena shall apply.

After the test, the apparatus shall continue to operate as intended. No degradation of performance or

loss of function is allowed below a permissible performance level specified by the manufacturer, when the apparatus is used as intended. In some cases this permissible performance level may be replaced by a permissible loss of performance.

During the EMC exposure to an electromagnetic phenomenon, a degradation of performance is, however, allowed. No change of the actual mode of operation (e.g. unintended transmission) or stored data is allowed.

If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be deduced from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.

(3) Performance criteria for equipment which does not provide a continuous communication link

For radio equipment which does not provide a continuous communication link, the performance criteria described in clauses (1) and (2) are not appropriate, then the manufacturer shall declare, for inclusion in the test report, his own specification for an acceptable level of performance or degradation of performance during and/or after the immunity tests. The performance specification shall be included in the product description and documentation. The related specifications set out in clause 5.3 of EN 301 489-1 V1.6.1 (2005-09) have also to be taken into account.

The performance criteria specified by the manufacturer shall give the same degree of immunity protection as called for in clauses (1) and (2).

(4) Performance criteria for ancillary equipment tested on a stand alone basis

If ancillary equipment is intended to be tested on a stand alone basis, the performance criteria described in clauses (1) and (2) are not appropriate, then the manufacturer shall declare, for inclusion in the test report, his own specification for an acceptable level of performance or degradation of performance during and/or after the immunity tests. The performance specification shall be included in the product description and documentation. The related specifications set out in clause 5.3 of EN 301 489-1 V1.6.1 (2005-09) have also to be taken into account.

The performance criteria specified by the manufacturer shall give the same degree of immunity protection as called for in clauses (1) and (2).

Performance table

Performance criteria		
Criteria	During Test	After test
A	<ul style="list-style-type: none"> ● Shall operate as intended ● May show degradation of performance (see note 1) ● Shall be no loss of function ● Shall be no unintentional transmissions 	<ul style="list-style-type: none"> ● Shall operate as intended ● Shall be no degradation of performance (see note 2) ● Shall be no loss of function ● Shall be no loss of stored data or user programmable functions
B	<ul style="list-style-type: none"> ● May show loss of function (one or more) ● May show degradation of performance (see note 1) ● No unintentional transmission 	<ul style="list-style-type: none"> ● Functions shall be self-recoverable ● Shall operate as intended after recovering ● Shall be no degradation of performance (see note 2) ● Shall be no loss of stored data or user programmable functions
C	<ul style="list-style-type: none"> ● May be loss of function (one or more) 	<ul style="list-style-type: none"> ● Functions shall be recoverable by the operator ● Shall operate as intended after recovering ● Shall be no degradation of performance (see note 2)

Note 1: Degradation of performance during the test is understood as a degradation to a level not below a minimum performance level specified by the manufacturer for the use of the apparatus as intended. In some cases the specified minimum performance level may be replaced by a permissible degradation of performance.

If the minimum performance level or the permissible performance degradation is not specified by the manufacturer then either of these may be derived from the product description and documentation (including leaflets and advertising) and what the user may reasonably expect from the apparatus if used as intended.


Note 2: No degradation of performance after the test is understood as no degradation below a minimum performance level specified by the manufacturer for the use of the apparatus as intended. In some cases the specified minimum performance level may be replaced by a permissible degradation of performance. After the test no change of actual operating data or user retrievable data is allowed. If the minimum performance level or the permissible performance degradation is not specified by the manufacturer then either of these may be derived from the product description and documentation (including leaflets and advertising) and what the user may reasonably expect from the apparatus if used as intended.

3. Conducted Emission (AC input/output Ports)

3.1. Test Specification

According to EMC Standard: EN 55022 Class B

3.2. Test Setup

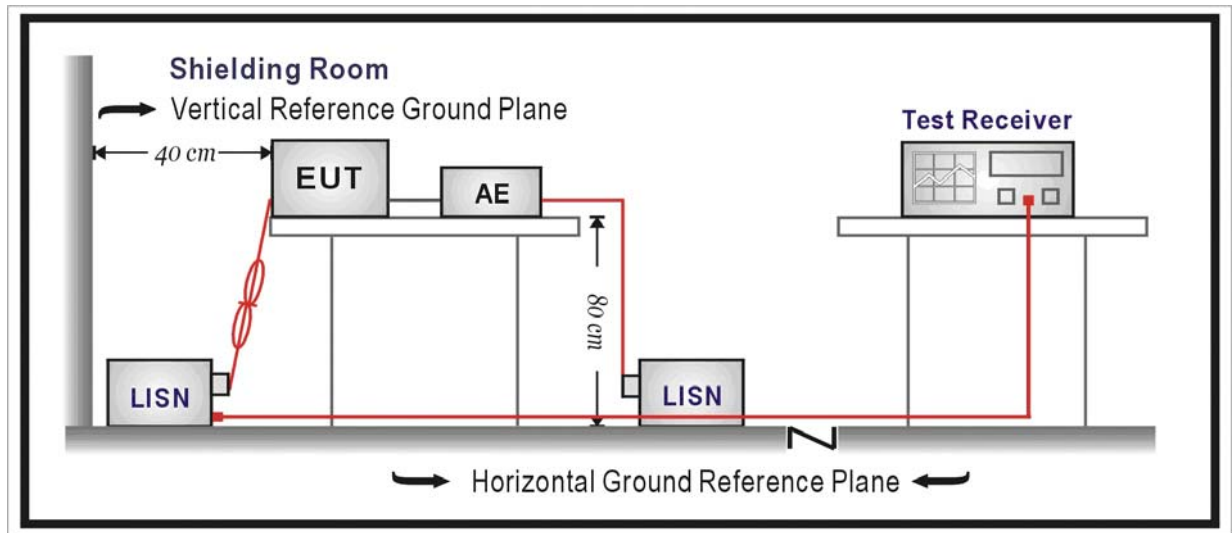

3.3. Limit

Limits for conducted emissions of equipment intended to be used in telecommunication centers only		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	79	66
0.50 - 30	73	60

Note: The lower limit shall apply at the transition frequencies.

Limits for Conducted Emissions		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

3.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination.

(Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed on conducted measurement.


Conducted emissions were invested over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

3.5. Deviation from Test Standard


No deviation.

3.6. Test Result

Engineer : Jame	
Site : SR-1 (Conducted Emission and Power Disturbance Test)	Time : 2008/11/10 - 15:39
Limit : EN55022_B_00M_QP	Margin : 10
EUT : WIRELESS-A/N 26DBM NETWORK MINI PCI ADAPTER	Probe : ENV216_100014(0.009-30MHz) - Line1
Power : AC 230V/50Hz	Note : Mode 1: Communication by WLAN

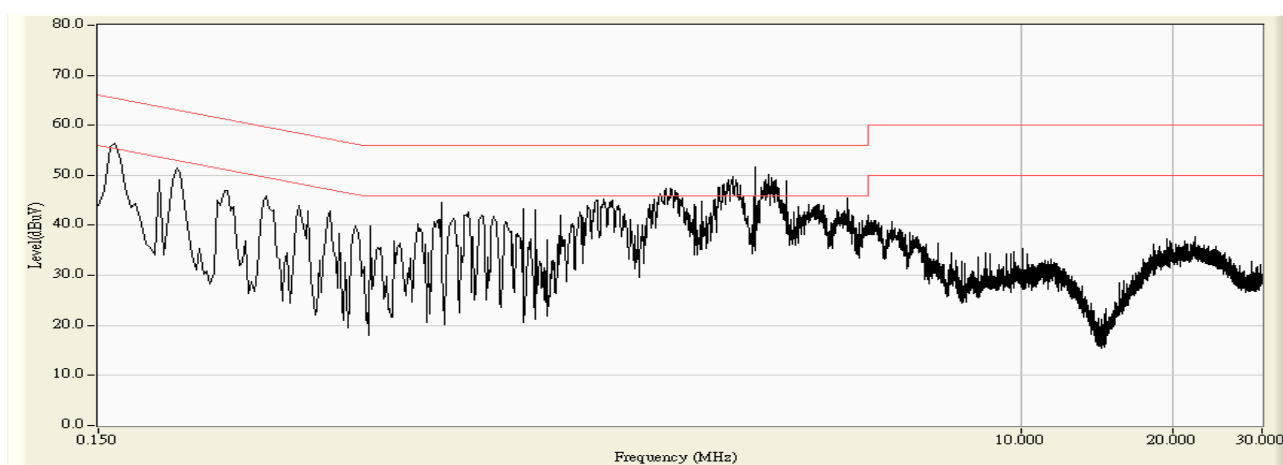


Engineer : Jame	
Site : SR-1 (Conducted Emission and Power Disturbance Test)	Time : 2008/11/10 - 15:41
Limit : EN55022_B_00M_QP	Margin : 0
EUT : WIRELESS-A/N 26DBM NETWORK MINI PCI ADAPTER	Probe : ENV216_100014(0.009-30MHz) - Line1
Power : AC 230V/50Hz	Note : Mode 1: Communication by WLAN

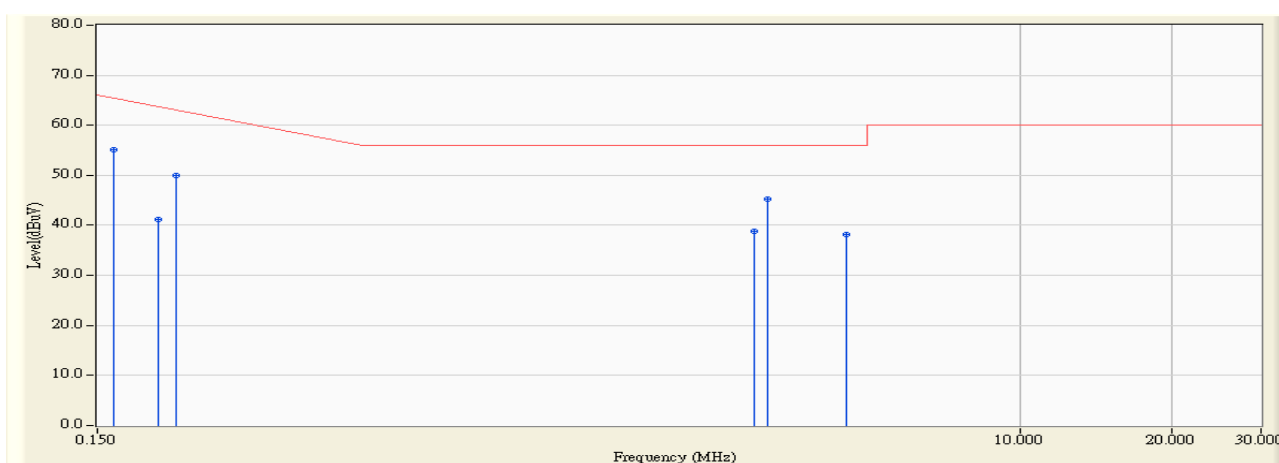


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1	*	0.162	10.161	44.900	55.061	-10.596	65.657	QUASIPeAK
2		0.198	9.580	31.600	41.180	-23.449	64.629	QUASIPeAK
3		0.214	9.473	40.600	50.073	-14.098	64.171	QUASIPeAK
4		2.978	9.740	29.000	38.740	-17.260	56.000	QUASIPeAK
5		3.178	9.760	35.400	45.160	-10.840	56.000	QUASIPeAK
6		4.534	9.849	28.400	38.249	-17.751	56.000	QUASIPeAK

Engineer : Jame	
Site : SR-1 (Conducted Emission and Power Disturbance Test)	Time : 2008/11/10 - 15:41
Limit : EN55022_B_00M_AV	Margin : 0
EUT : WIRELESS-A/N 26DBM NETWORK MINI PCI ADAPTER	Probe : ENV216_100014(0.009-30MHz) - Line1
Power : AC 230V/50Hz	Note : Mode 1: Communication by WLAN

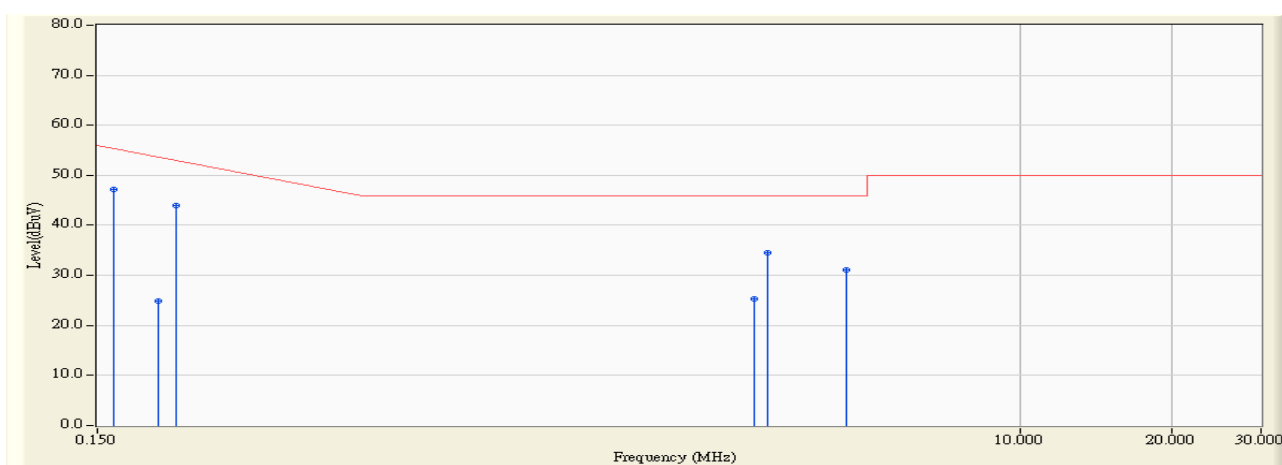


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1	*	0.162	10.161	37.000	47.161	-8.496	55.657	AVERAGE
2		0.198	9.580	15.200	24.780	-29.849	54.629	AVERAGE
3		0.214	9.473	34.500	43.973	-10.198	54.171	AVERAGE
4		2.978	9.740	15.500	25.240	-20.760	46.000	AVERAGE
5		3.178	9.760	24.700	34.460	-11.540	46.000	AVERAGE
6		4.534	9.849	21.200	31.049	-14.951	46.000	AVERAGE

Engineer : Jame	
Site : SR-1 (Conducted Emission and Power Disturbance Test)	Time : 2008/11/10 - 15:44
Limit : EN55022_B_00M_QP	Margin : 10
EUT : WIRELESS-A/N 26DBM NETWORK MINI PCI ADAPTER	Probe : ENV216_100014(0.009-30MHz) - Line2
Power : AC 230V/50Hz	Note : Mode 1: Communication by WLAN

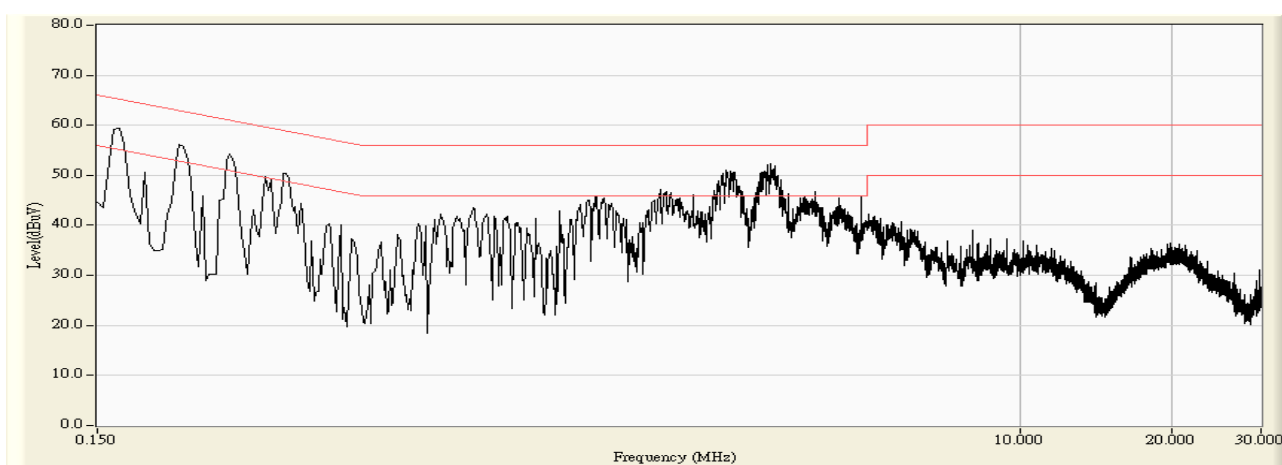


Engineer : Jame	
Site : SR-1 (Conducted Emission and Power Disturbance Test)	Time : 2008/11/10 - 15:46
Limit : EN55022_B_00M_QP	Margin : 0
EUT : WIRELESS-A/N 26DBM NETWORK MINI PCI ADAPTER	Probe : ENV216_100014(0.009-30MHz) - Line2
Power : AC 230V/50Hz	Note : Mode 1: Communication by WLAN

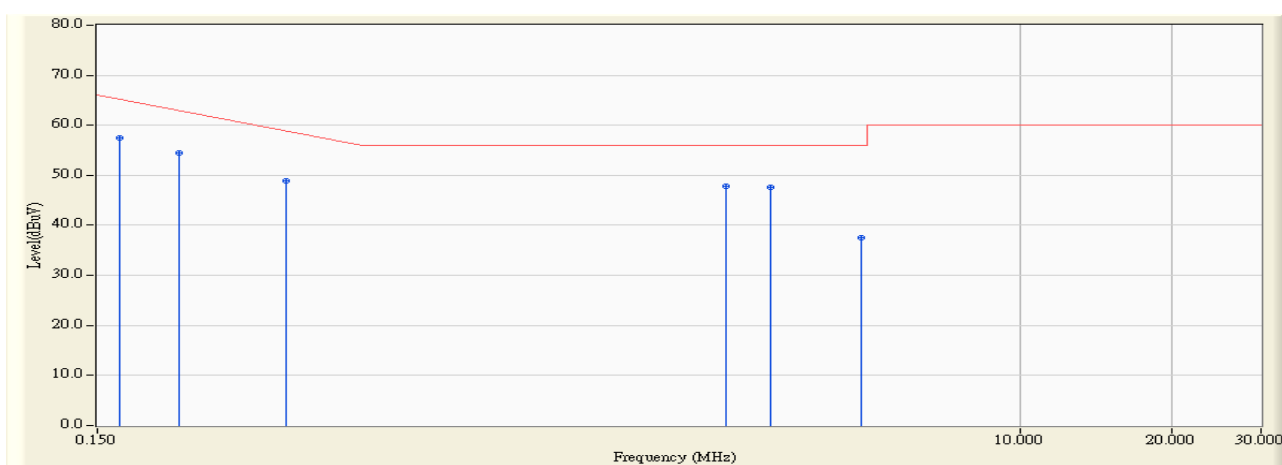

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1	*	0.166	9.952	47.600	57.552	-7.991	65.543	QUASIPeAK
2		0.218	9.584	44.900	54.484	-9.573	64.057	QUASIPeAK
3		0.354	9.605	39.200	48.805	-11.366	60.171	QUASIPeAK
4		2.634	9.680	38.100	47.780	-8.220	56.000	QUASIPeAK
5		3.222	9.690	38.000	47.690	-8.310	56.000	QUASIPeAK
6		4.858	9.730	27.700	37.430	-18.570	56.000	QUASIPeAK

Engineer : Jame	
Site : SR-1 (Conducted Emission and Power Disturbance Test)	Time : 2008/11/10 - 15:46
Limit : EN55022_B_00M_AV	Margin : 0
EUT : WIRELESS-A/N 26DBM NETWORK MINI PCI ADAPTER	Probe : ENV216_100014(0.009-30MHz) - Line2
Power : AC 230V/50Hz	Note : Mode 1: Communication by WLAN

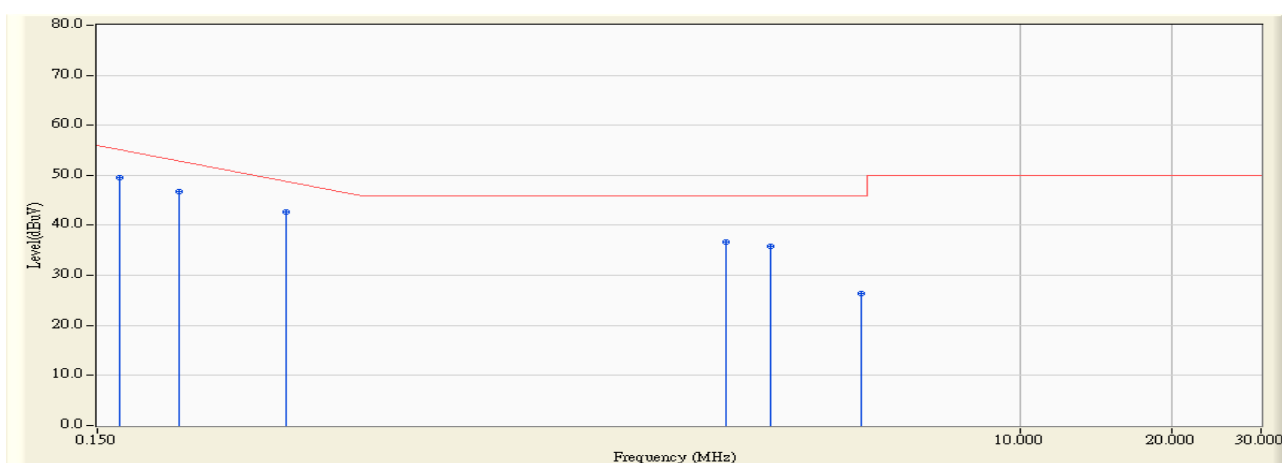

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1	*	0.166	9.952	39.500	49.452	-6.091	55.543	AVERAGE
2		0.218	9.584	37.100	46.684	-7.373	54.057	AVERAGE
3		0.354	9.605	33.000	42.605	-7.566	50.171	AVERAGE
4		2.634	9.680	26.900	36.580	-9.420	46.000	AVERAGE
5		3.222	9.690	26.100	35.790	-10.210	46.000	AVERAGE
6		4.858	9.730	16.700	26.430	-19.570	46.000	AVERAGE

3.7. Test Photograph


Test Mode: Mode 1: Communication by WLAN

Description: Front View of Conducted Emission Test Setup (AC input/output Ports)



Test Mode: Mode 1: Communication by WLAN

Description: Back View of Conducted Emission Test Setup (AC input/output Ports)

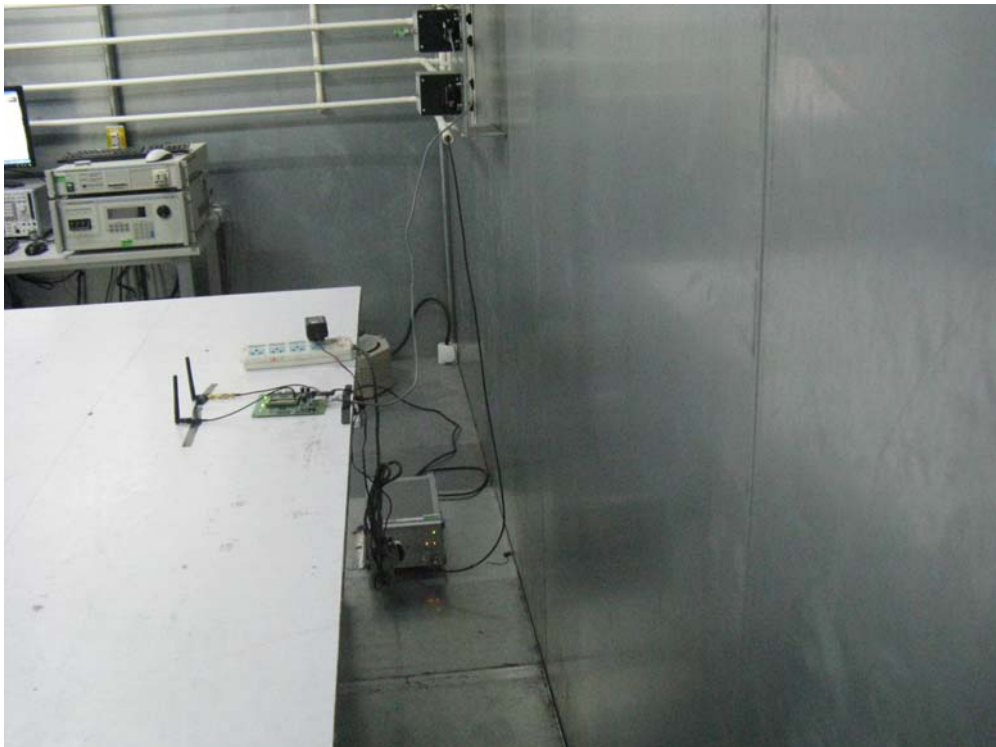


4. Conducted Emission (DC input/output Ports)

4.1. Test Specification

According to EMC Standard: EN 55022 Class B and CISPR 25

4.2. Test Setup

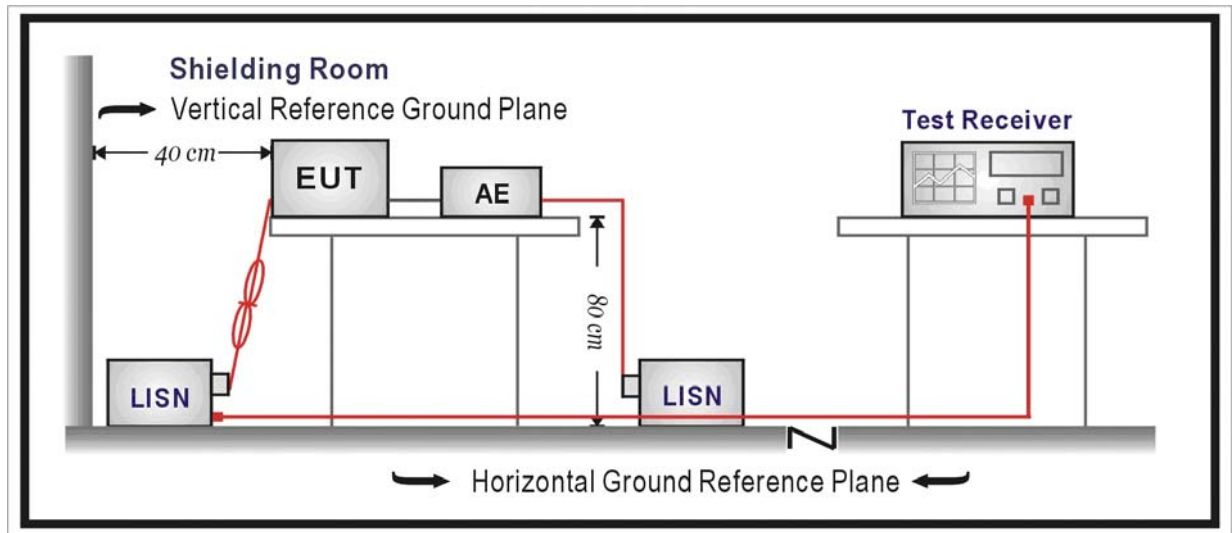

4.3. Limit

Limits for conducted emissions of equipment intended to be used in telecommunication centers only		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	79	66
0.50 - 30	73	60

Note: The lower limit shall apply at the transition frequencies.

Limits for Conducted Emissions		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

4.4. Test Procedure

The EUT and simulators are connected to the main power through a Artificial Mains Networks (AMN). For radio and ancillary equipment for fixed use, the Artificial Mains Networks (AMN) shall be used and be connected to a DC power source. For mobile radio and ancillary equipment intended to be connected to the vehicles's onboard DC mains, an Artificial Network (AN) shall be used and be connected to a DC power source.

(Please refers to the block diagram of the test setup and photographs.)

Both sides of D.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed on conducted measurement.

Conducted emissions were invested over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

4.5. Deviation from Test Standard

No deviation.

4.6. Test Result


The EUT has an AC/DC power supply, then the measurement only shall be performed on the AC power input port, so this test item needn't perform.

5. Conducted Emissions (Telecommunication Ports)

5.1. Test Specification

According to EMC Standard: EN 55022 Class B

5.2. Test Setup

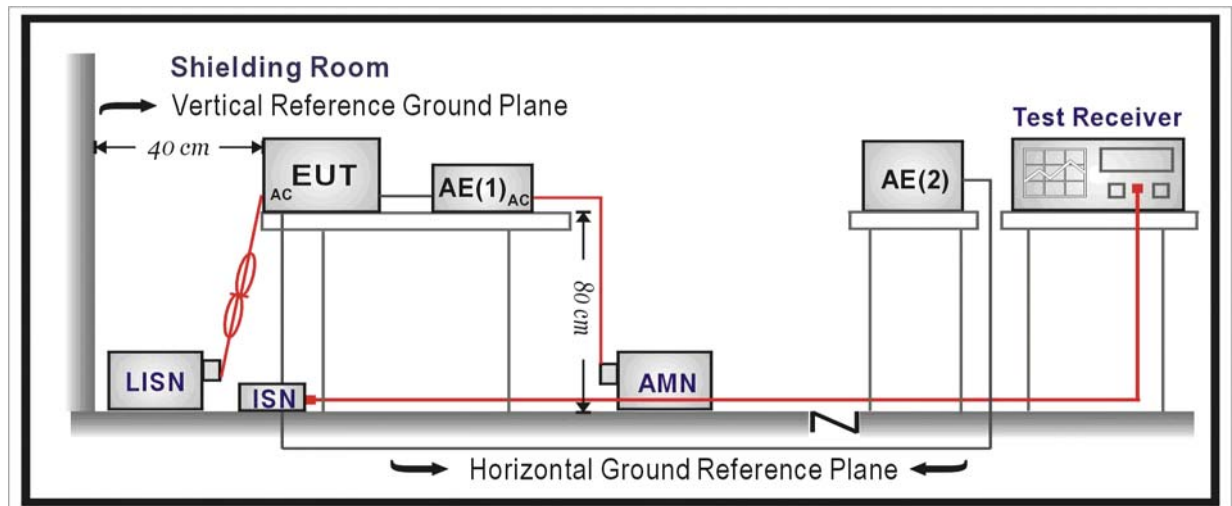

5.3. Limit

Limits for conducted emissions from telecommunication ports of equipment intended for use in telecommunication centres only				
Frequency (MHz)	Voltage		Current	
	QP (dBuV)	AV (dBuV)	QP (dBuA)	AV (dBuA)
0.15 - 0.50	97 - 87	84 - 74	53 - 43	40 - 30
0.50 - 30	87	74	43	30

Note 1: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

Note 2: The current and voltage disturbance limits are derived for use with an Impedance Stabilization Network (ISN), which presents a common mode (asymmetric mode) impedance of 150 ohm to the telecommunication port under test (conversion factor is $20 \log 150/I = 44 \text{ dB}$).

Limits for conducted emissions from telecommunication ports				
Frequency (MHz)	Voltage		Current	
	QP (dBuV)	AV (dBuV)	QP (dBuA)	AV (dBuA)
0.15 - 0.50	84 - 74	74 - 64	40 - 30	30 - 20
0.50 - 30	74	64	30	20

Note 1: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

Note 2: The current and voltage disturbance limits are derived for use with an Impedance Stabilization Network (ISN) which presents common mode (asymmetric mode) impedance of 150 ohm to the telecommunication port under test (conversion factor is $20 \log 150/I = 44 \text{ dB}$).

Note 3: The emission requirement only applies to telecommunication ports. The provisional relaxation of 10 dB will be reviewed no later than 3 years after the date of withdrawal based on the results and interference cases seen in this period. Wherever possible it is recommended to comply with the limits without the provisional relaxation.

5.4. Test Procedure


The mains voltage shall be supplied to the EUT via the LISN when the measurement of telecommunication port is performed. The common mode disturbances at the telecommunication port shall be connected to the ISN, which is 150 ohm impedance. Both alternative cables are tested related to the LCL requested. The measurement range is from 150kHz to 30MHz. The bandwidth of measurement is set to 9kHz.

5.5. Deviation from Test Standard


No deviation.

5.6. Test Result

Engineer : Jame	
Site : SR-1 (Conducted Emission and Power Disturbance Test)	Time : 2008/11/10 - 18:02
Limit : ISN_Voltage_B_00M_QP	Margin : 10
EUT : WIRELESS-A/N 26DBM NETWORK MINI PCI ADAPTER	Probe : FCC-TLISN-T4_20353(0.15-30MHz) - Line1
Power : AC 230V/50Hz	Note : Mode 1: Communication by WLAN – LAN 10Mbps

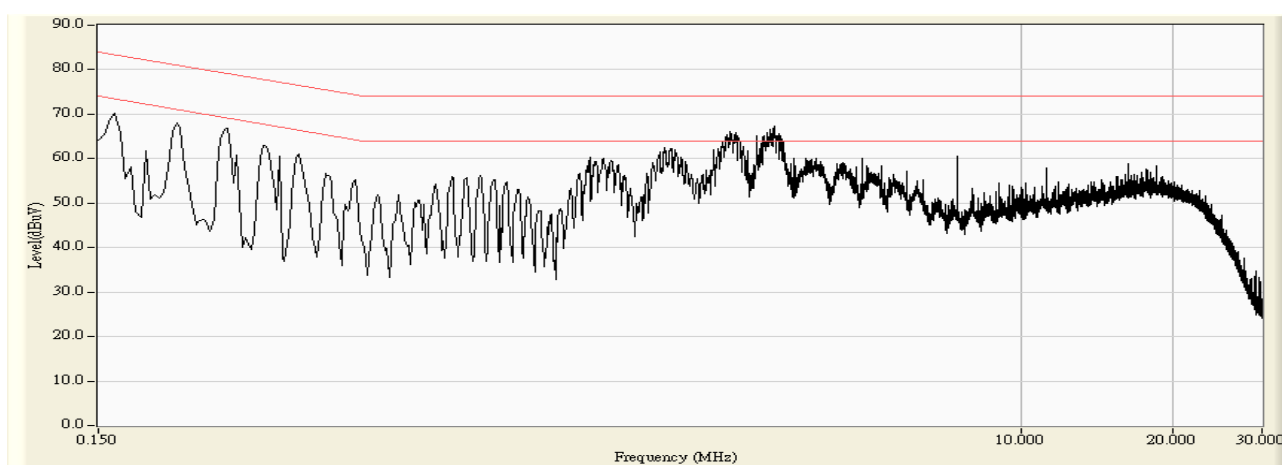


Engineer : Jame	
Site : SR-1 (Conducted Emission and Power Disturbance Test)	Time : 2008/11/10 - 18:04
Limit : ISN_Voltage_B_00M_QP	Margin : 0
EUT : WIRELESS-A/N 26DBM NETWORK MINI PCI ADAPTER	Probe : FCC-TLISN-T4_20353(0.15-30MHz) - Line1
Power : AC 230V/50Hz	Note : Mode 1: Communication by WLAN – LAN 10Mbps

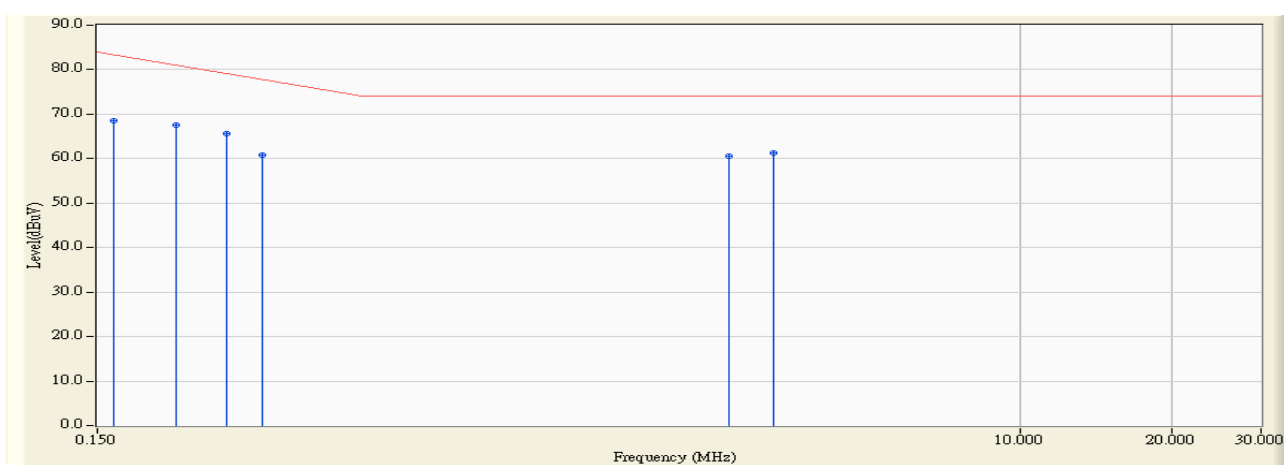


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		0.162	9.866	58.700	68.566	-15.091	83.657	QUASIPeAK
2		0.214	9.859	57.600	67.459	-14.712	82.171	QUASIPeAK
3		0.270	9.850	55.800	65.650	-14.921	80.571	QUASIPeAK
4		0.318	9.850	50.900	60.750	-18.450	79.200	QUASIPeAK
5		2.666	9.780	50.900	60.680	-13.320	74.000	QUASIPeAK
6	*	3.254	9.790	51.400	61.190	-12.810	74.000	QUASIPeAK

Engineer : Jame	
Site : SR-1 (Conducted Emission and Power Disturbance Test)	Time : 2008/11/10 - 18:04
Limit : ISN_Voltage_B_00M_AV	Margin : 0
EUT : WIRELESS-A/N 26DBM NETWORK MINI PCI ADAPTER	Probe : FCC-TLISN-T4_20353(0.15-30MHz) - Line1
Power : AC 230V/50Hz	Note : Mode 1: Communication by WLAN – LAN 10Mbps

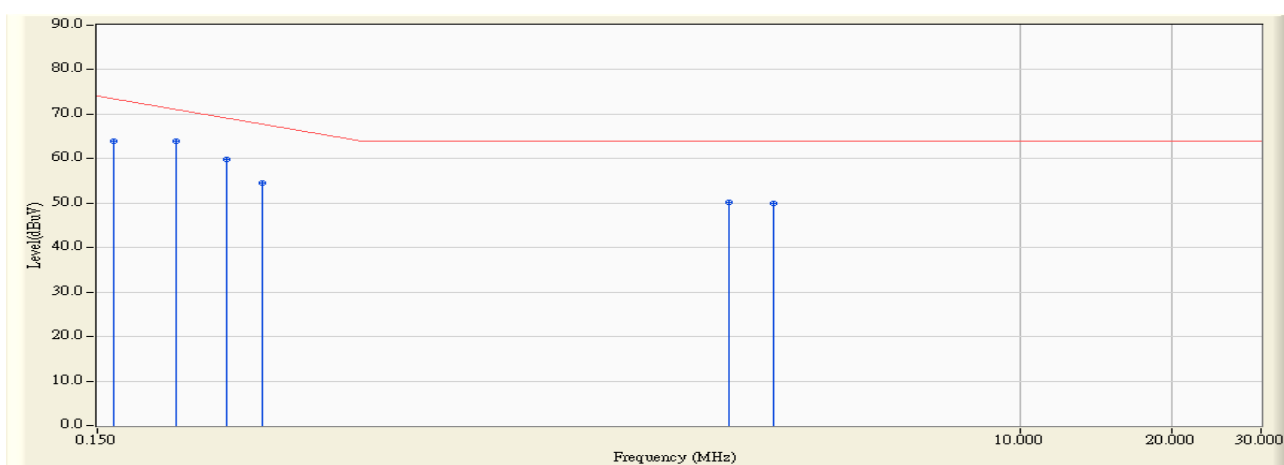


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		0.162	9.866	54.000	63.866	-9.791	73.657	AVERAGE
2	*	0.214	9.859	54.000	63.859	-8.312	72.171	AVERAGE
3		0.270	9.850	49.900	59.750	-10.821	70.571	AVERAGE
4		0.318	9.850	44.800	54.650	-14.550	69.200	AVERAGE
5		2.666	9.780	40.400	50.180	-13.820	64.000	AVERAGE
6		3.254	9.790	40.100	49.890	-14.110	64.000	AVERAGE

Engineer : Jame	
Site : SR-1 (Conducted Emission and Power Disturbance Test)	Time : 2008/11/10 - 18:08
Limit : ISN_Voltage_B_00M_QP	Margin : 10
EUT : WIRELESS-A/N 26DBM NETWORK MINI PCI ADAPTER	Probe : FCC-TLISN-T4_20353(0.15-30MHz) - Line1
Power : AC 230V/50Hz	Note : Mode 1: Communication by WLAN – LAN 100Mbps

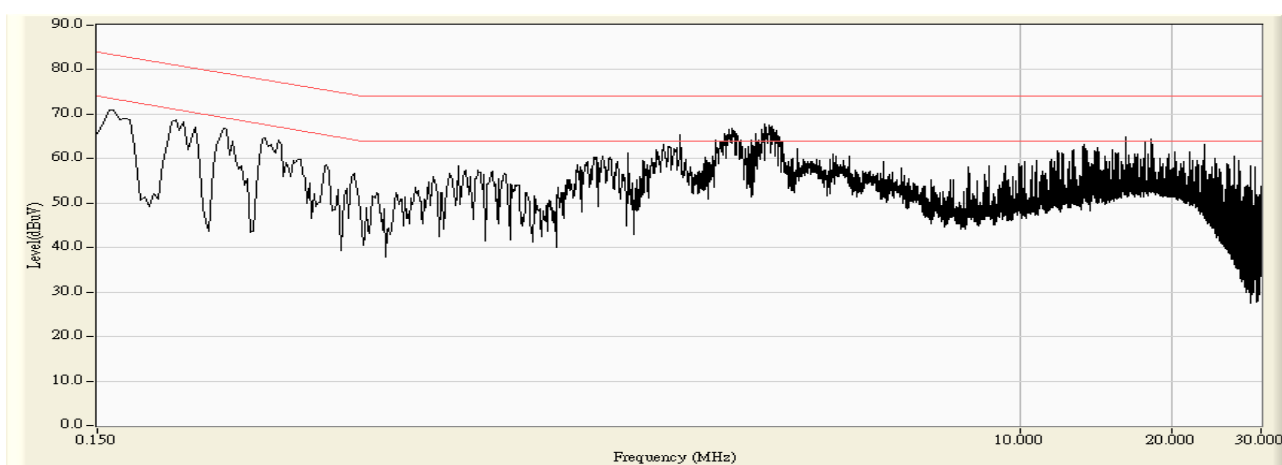


Engineer : Jame	
Site : SR-1 (Conducted Emission and Power Disturbance Test)	Time : 2008/11/10 - 18:11
Limit : ISN_Voltage_B_00M_QP	Margin : 0
EUT : WIRELESS-A/N 26DBM NETWORK MINI PCI ADAPTER	Probe : FCC-TLISN-T4_20353(0.15-30MHz) - Line1
Power : AC 230V/50Hz	Note : Mode 1: Communication by WLAN – LAN 100Mbps

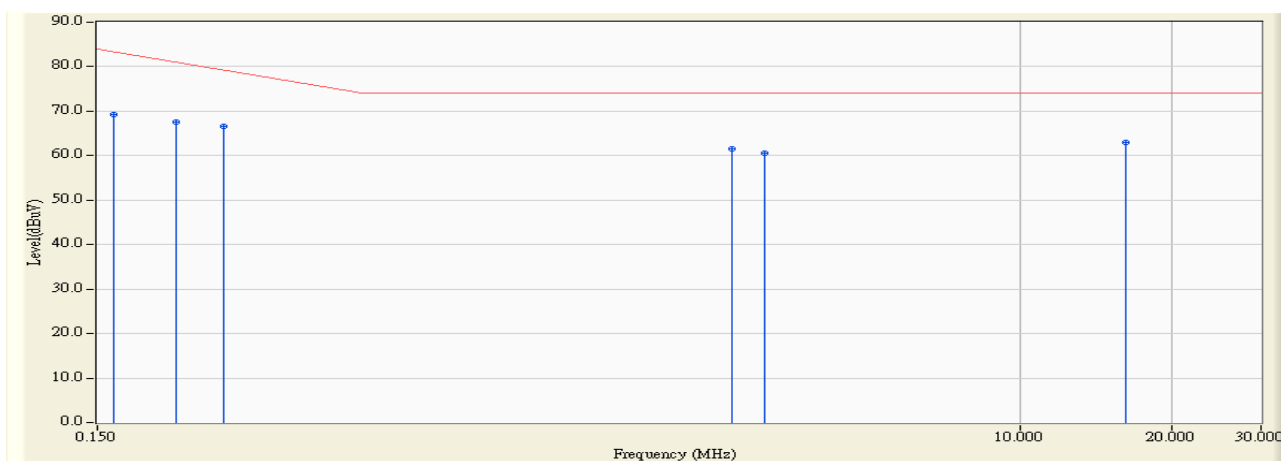

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		0.162	9.866	59.300	69.166	-14.491	83.657	QUASIPeAK
2		0.214	9.859	57.800	67.659	-14.512	82.171	QUASIPeAK
3		0.266	9.850	56.700	66.550	-14.136	80.686	QUASIPeAK
4		2.706	9.780	51.700	61.480	-12.520	74.000	QUASIPeAK
5		3.134	9.790	50.700	60.490	-13.510	74.000	QUASIPeAK
6	*	16.230	9.970	52.900	62.870	-11.130	74.000	QUASIPeAK

Engineer : Jame	
Site : SR-1 (Conducted Emission and Power Disturbance Test)	Time : 2008/11/10 - 18:11
Limit : ISN_Voltage_B_00M_AV	Margin : 0
EUT : WIRELESS-A/N 26DBM NETWORK MINI PCI ADAPTER	Probe : FCC-TLISN-T4_20353(0.15-30MHz) - Line1
Power : AC 230V/50Hz	Note : Mode 1: Communication by WLAN – LAN 100Mbps

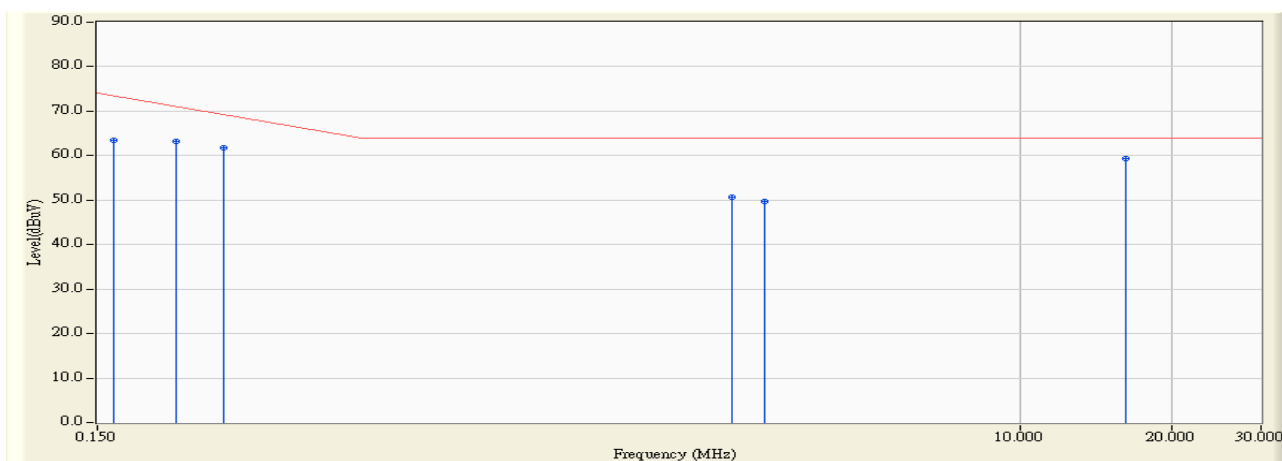

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		0.162	9.866	53.500	63.366	-10.291	73.657	AVERAGE
2		0.214	9.859	53.400	63.259	-8.912	72.171	AVERAGE
3		0.266	9.850	51.900	61.750	-8.936	70.686	AVERAGE
4		2.706	9.780	40.900	50.680	-13.320	64.000	AVERAGE
5		3.134	9.790	39.800	49.590	-14.410	64.000	AVERAGE
6	*	16.230	9.970	49.400	59.370	-4.630	64.000	AVERAGE

5.7. Test Photograph


Test Mode: Mode 1: Communication by WLAN

Description: Front View of Conducted Emission Test Setup for LAN



Test Mode: Mode 1: Communication by WLAN

Description: Back View of Conducted Emission Test Setup for LAN

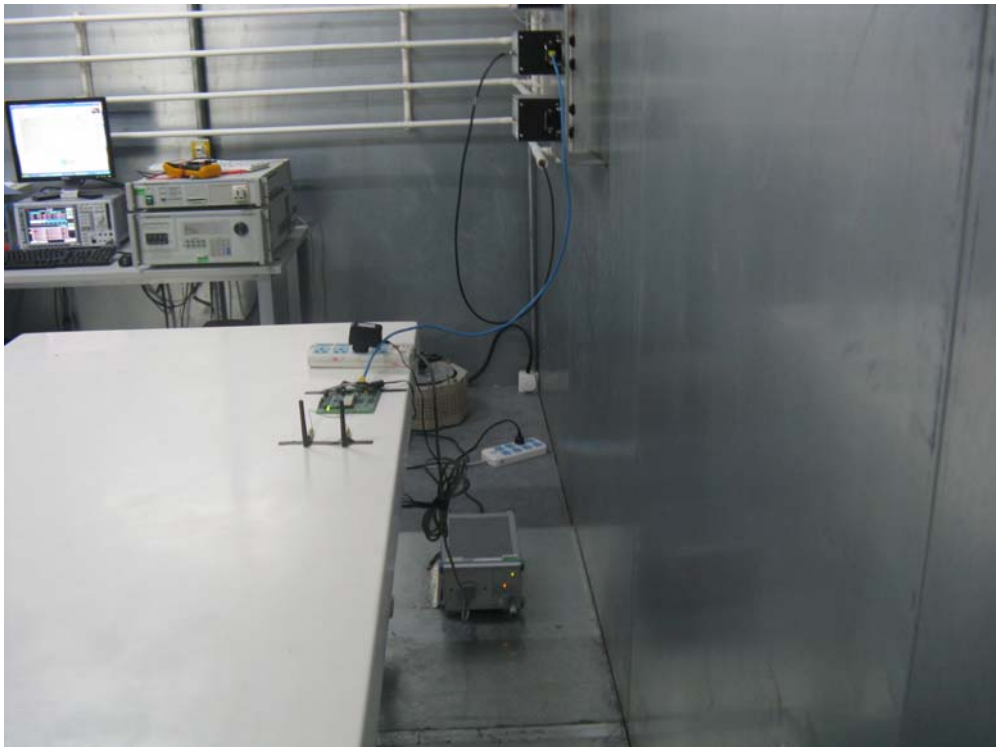


6. Radiated Emission

6.1. Test Specification

According to EMC Standard: EN 55022 Class B

6.2. Test Setup

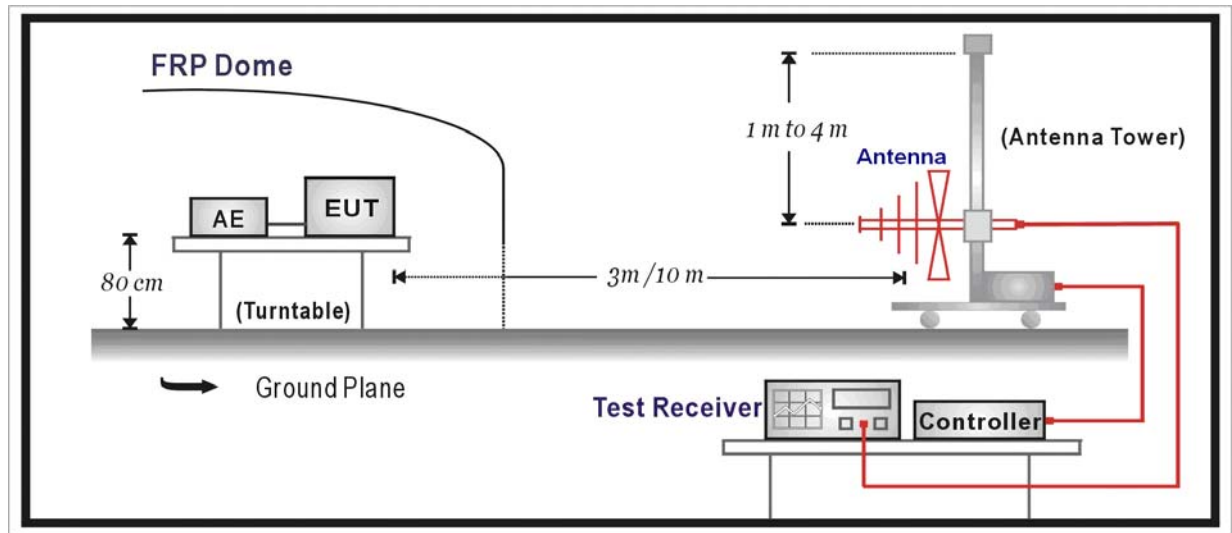

6.3. Limit

Limits for radiated emissions from ancillary equipment intended for use in telecommunication centers only, and measured on a stand alone basis		
Frequency (MHz)	Distance (m)	QP (dBuV/m)
30 - 230	10	40
230 - 1000	10	47

Note 1: The lower limit shall apply at the transition frequency.

Note 2: Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

Limits for radiated emissions from ancillary equipment, measured on a stand-alone basis		
Frequency (MHz)	Distance (m)	QP (dBuV/m)
30 - 230	10	30
230 - 1000	10	37

Note 1: The lower limit shall apply at the transition frequency.

Note 2: Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

6.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 10 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated on radiated measurement.


Radiated emissions were investigated over the frequency range from 30MHz to 1GHz using a receiver bandwidth of 120kHz.

6.5. Deviation from Test Standard

No deviation.


6.6. Test Result

Engineer : Jame	
Site : AC-1 (10m Semi-Anechoic Chamber)	Time : 2008/11/18 - 17:04
Limit : EN55022_B_10M_QP	Margin : 0
EUT : WIRELESS-A/N 26DBM NETWORK MINI PCI ADAPTER	Probe : CBL6112B_2931(30-2000MHz) - HORIZONTAL
Power : AC 230V/50Hz	Note : Mode 1: Communication by WLAN

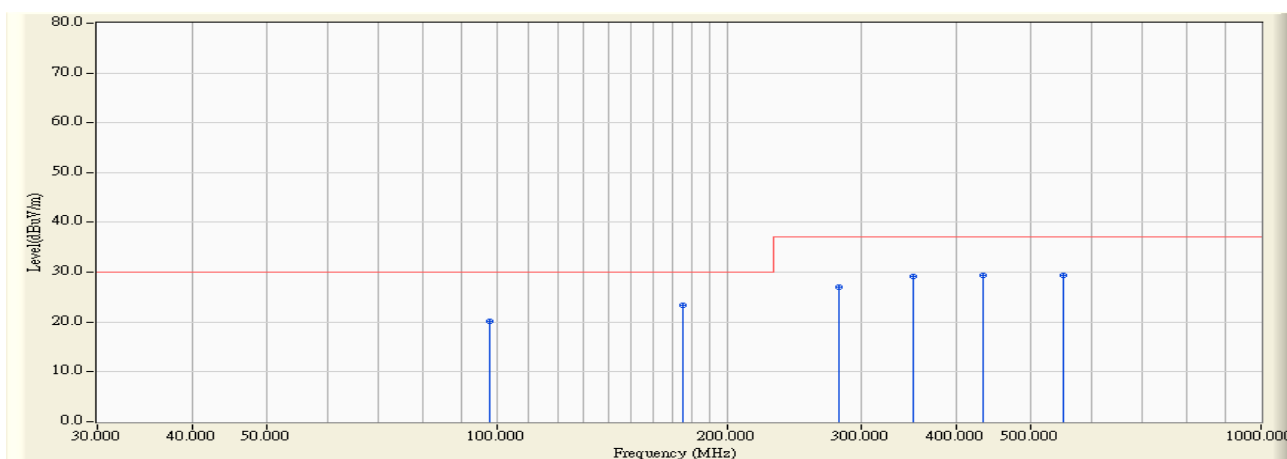

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type	Ant Pos (cm)	Table Pos (deg)
1		97.900	-11.461	31.658	20.197	-9.803	30.000	QUASIPeAK	100.000	223.000
2	*	175.500	-12.320	35.671	23.351	-6.649	30.000	QUASIPeAK	101.000	114.000
3		279.775	-7.841	34.854	27.013	-9.987	37.000	QUASIPeAK	112.000	183.000
4		350.100	-5.351	34.585	29.234	-7.766	37.000	QUASIPeAK	100.000	315.000
5		432.550	-3.087	32.507	29.420	-7.580	37.000	QUASIPeAK	110.000	324.000
6		551.375	-0.343	29.728	29.385	-7.615	37.000	QUASIPeAK	100.000	284.000

Engineer : Jame	
Site : AC-1 (10m Semi-Anechoic Chamber)	Time : 2008/11/18 - 17:01
Limit : EN55022_B_10M_QP	Margin : 0
EUT : WIRELESS-A/N 26DBM NETWORK MINI PCI ADAPTER	Probe : CBL6112B_2933(30-2000MHz) - VERTICAL
Power : AC 230V/50Hz	Note : Mode 1: Communication by WLAN

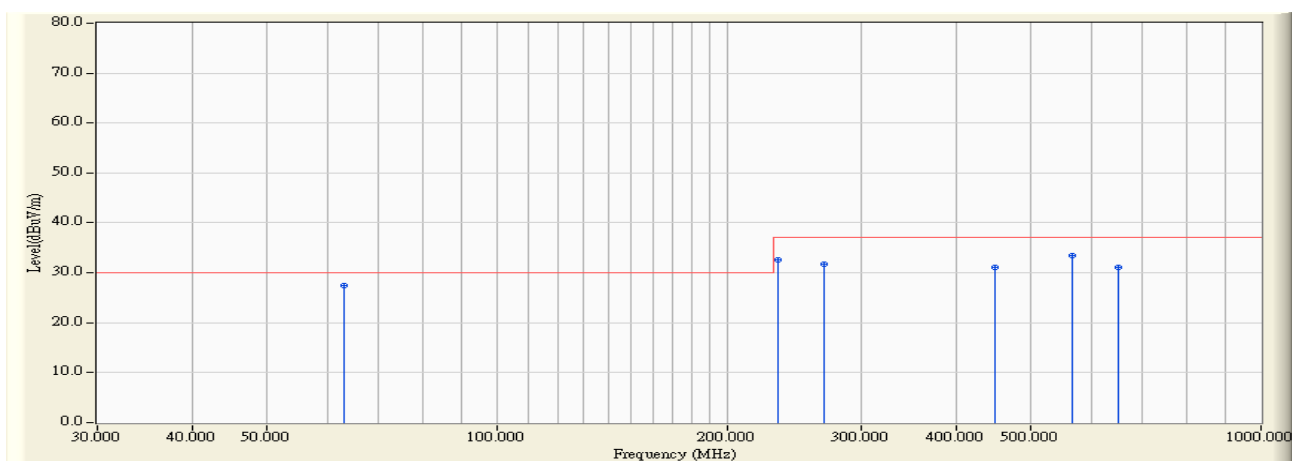


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type	Ant Pos (cm)	Table Pos (deg)
1	*	63.010	-16.758	44.200	27.442	-2.558	30.000	QUASIPeAK	267.000	78.000
2		233.320	-10.392	42.900	32.508	-4.492	37.000	QUASIPeAK	100.000	342.000
3		267.650	-7.377	39.091	31.714	-5.286	37.000	QUASIPeAK	100.000	324.000
4		449.525	-2.650	33.761	31.111	-5.889	37.000	QUASIPeAK	100.000	201.000
5		565.925	0.295	33.206	33.501	-3.499	37.000	QUASIPeAK	194.000	343.200
6		650.800	0.591	30.604	31.195	-5.805	37.000	QUASIPeAK	184.000	274.000

6.7. Test Photograph


Test Mode : Mode 1: Communication by WLAN

Description : Front View of Radiated Emission Test Setup

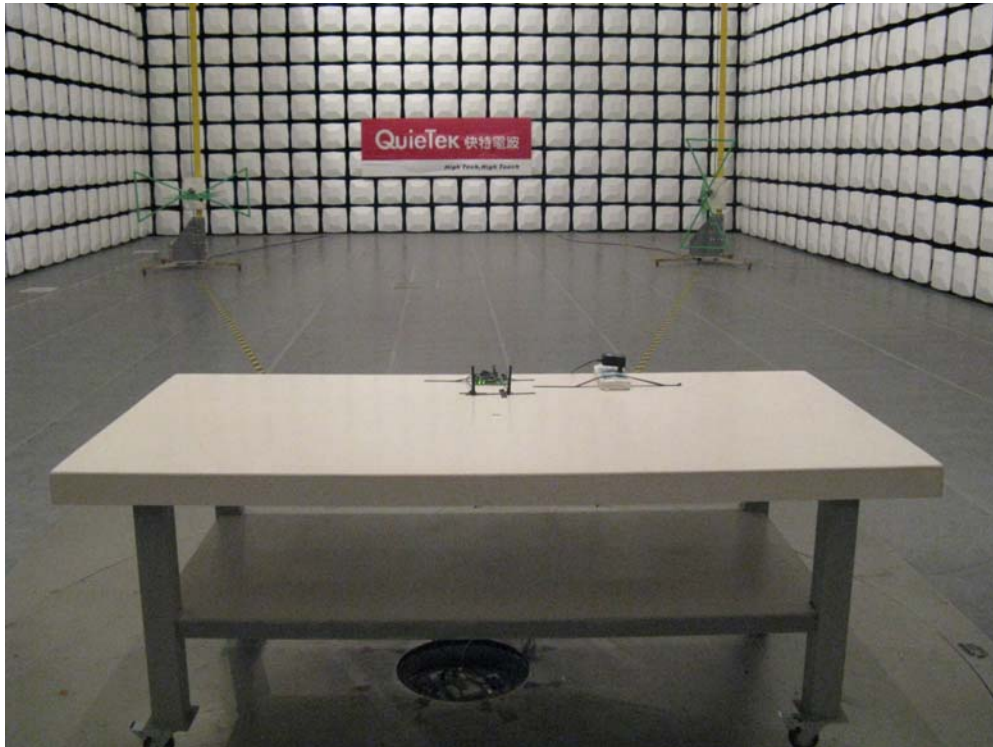

Test Mode : Mode 1: Communication by WLAN

Description : Back View of Radiated Emission Test Setup

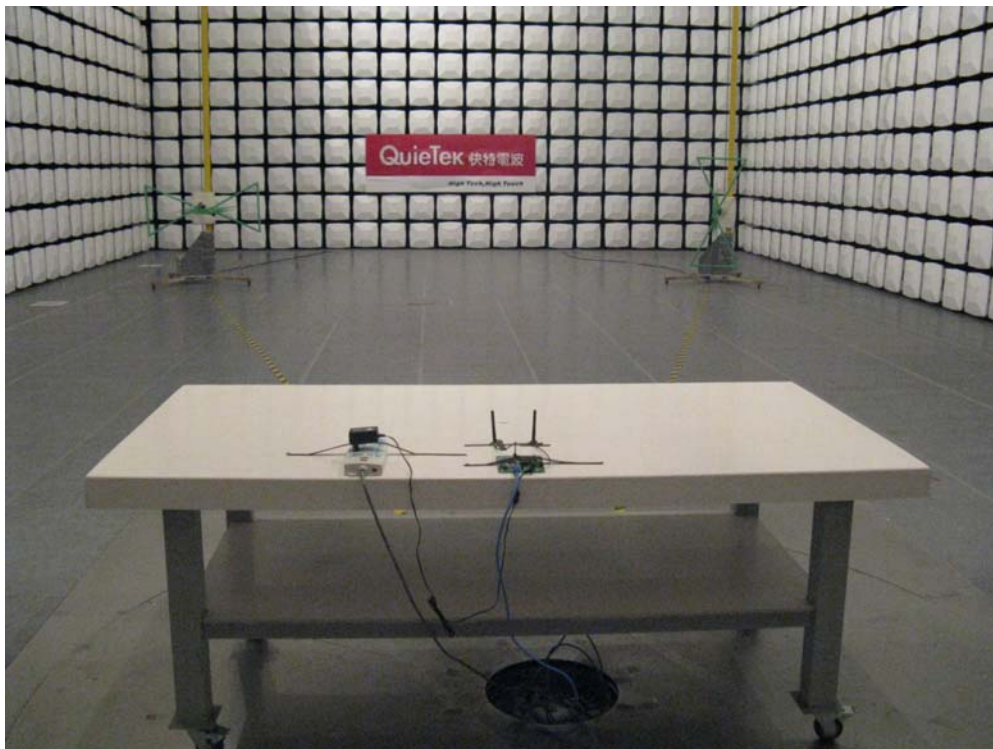


7. Harmonic Current Emission

7.1. Test Specification

According to EMC Standard: EN 61000-3-2

7.2. Test Setup

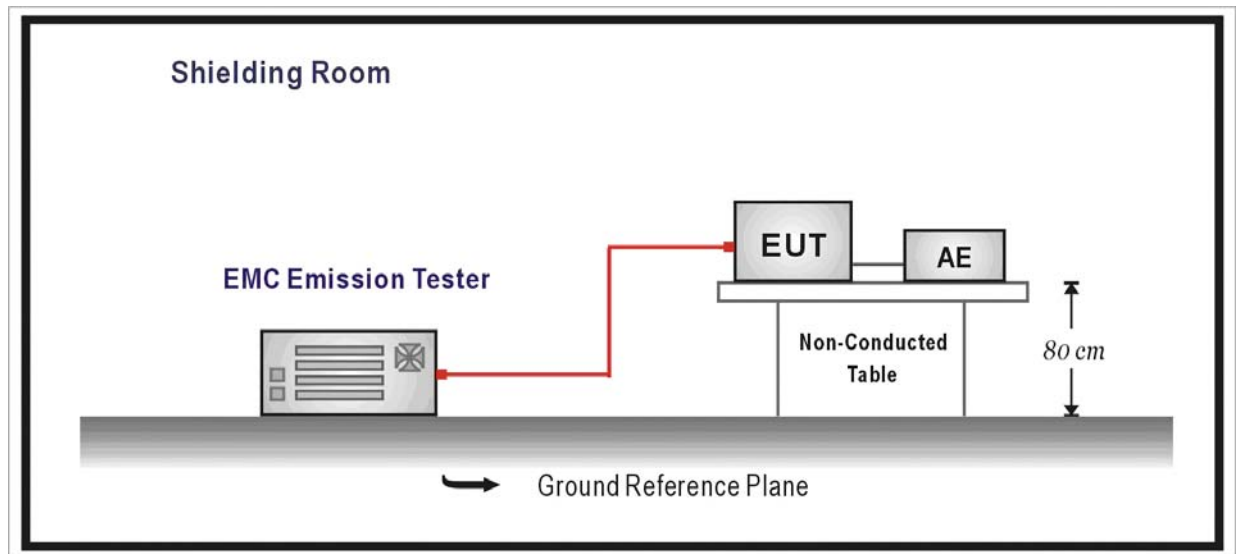

7.3. Limit

(a) Limits of Class A Harmonics Currents

Harmonics Order n	Maximum Permissible harmonic current A	Harmonics Order n	Maximum Permissible harmonic current A
Odd harmonics		Even harmonics	
3	2.30	2	1.08
5	1.14	4	0.43
7	0.77	6	0.30
9	0.40	$8 \leq n \leq 40$	$0.23 * 8/n$
11	0.33		
13	0.21		
$15 \leq n \leq 39$	$0.15 * 15/n$		

(b) Limits of Class B Harmonics Currents

For Class B equipment, the harmonic of the input current shall not exceed the maximum permissible values given in table that is the limit of Class A multiplied by a factor of 1.5.

(c) Limits of Class C Harmonics Currents

Harmonics Order n	Maximum Permissible harmonic current Expressed as a percentage of the input current at the fundamental frequency %
2	2
3	$30 \cdot \lambda^*$
5	10
7	7
9	5
$11 \leq n \leq 39$ (odd harmonics only)	3
* λ is the circuit power factor	

(d) Limits of Class D Harmonics Currents

Harmonics Order n	Maximum Permissible harmonic current per watt mA/W	Maximum Permissible harmonic current A
3	3.4	2.30
5	1.9	1.14
7	1.0	0.77
9	0.5	0.40
11	0.35	0.33
$11 \leq n \leq 39$ (odd harmonics only)	$3.85/n$	See limit of Class A

7.4. Test Procedure

The EUT is supplied in series with power analyzer from a power source having the same normal voltage and frequency as the rated supply voltage and the equipment under test. And the rated voltage at the supply voltage of EUT of 0.94 times and 1.06 times shall be performed.

7.5. Deviation from Test Standard

No deviation.


7.6. Test Result

Product	WIRELESS-A/N 26DBM NETWORK MINI PCI ADAPTER
Test Item	Harmonic Current Emission
Test Mode	Mode 1: Communication by WLAN
Date of Test	2008/11/10
Test Site	SR-1

Test Result: Pass


Source qualification: Normal

Current & voltage waveforms

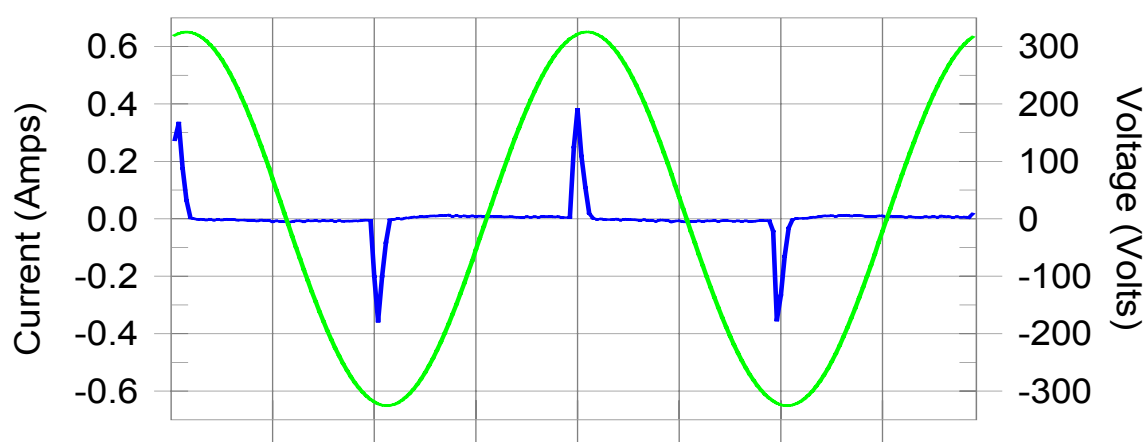

Harmonics and Class A limit line

European Limits

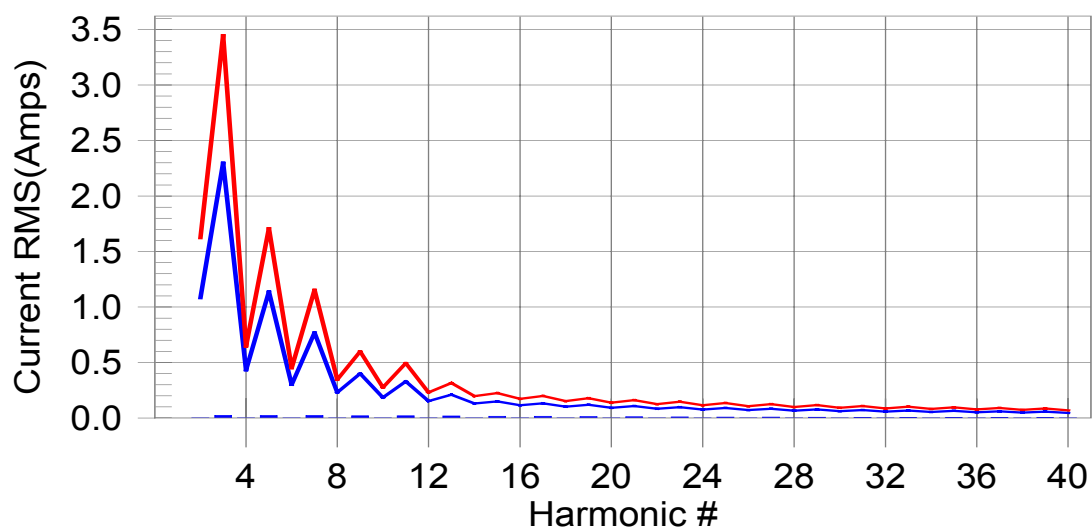

Test result: Pass

Test Result: Pass

Source qualification: Normal

THC(A): 0.06 I-THD(%): 239.85 POHC(A): 0.021 POHC Limit(A): 0.265
Highest parameter values during test:
V_RMS (Volts): 230.00 Frequency(Hz): 50.00
I_Peak (Amps): 0.403 I_RMS (Amps): 0.067
I_Fund (Amps): 0.026 Crest Factor: 6.049
Power (Watts): 5.6 Power Factor: 0.367

Harm#	Harms(avg)	100%Limit	%of Limit	Harms(max)	150%Limit	%of Limit	Status
2	0.000	1.080	0.0	0.001	1.620	0.08	Pass
3	0.024	2.300	1.0	0.024	3.450	0.70	Pass
4	0.000	0.430	0.0	0.001	0.645	0.15	Pass
5	0.022	1.140	2.0	0.023	1.710	1.33	Pass
6	0.000	0.300	0.0	0.001	0.450	0.15	Pass
7	0.022	0.770	2.8	0.022	1.155	1.89	Pass
8	0.000	0.230	0.0	0.001	0.345	0.15	Pass
9	0.020	0.400	5.1	0.021	0.600	3.42	Pass
10	0.000	0.184	0.0	0.001	0.276	0.20	Pass
11	0.019	0.330	5.8	0.019	0.495	3.89	Pass
12	0.000	0.153	0.0	0.001	0.230	0.22	Pass
13	0.018	0.210	8.4	0.018	0.315	5.64	Pass
14	0.000	0.131	0.0	0.000	0.197	0.25	Pass
15	0.016	0.150	10.7	0.016	0.225	7.18	Pass
16	0.000	0.115	0.0	0.000	0.173	0.28	Pass
17	0.014	0.132	11.0	0.015	0.199	7.31	Pass
18	0.000	0.102	0.0	0.001	0.153	0.33	Pass
19	0.013	0.118	10.8	0.013	0.178	7.24	Pass
20	0.000	0.092	0.0	0.001	0.138	0.37	Pass
21	0.011	0.107	10.5	0.011	0.161	7.03	Pass
22	0.000	0.084	0.0	0.000	0.125	0.40	Pass
23	0.010	0.098	10.0	0.010	0.147	6.69	Pass
24	0.000	0.077	0.0	0.000	0.115	0.43	Pass
25	0.008	0.090	9.4	0.008	0.135	6.28	Pass
26	0.000	0.071	0.0	0.001	0.106	0.48	Pass
27	0.007	0.083	8.7	0.007	0.125	5.86	Pass
28	0.000	0.066	0.0	0.000	0.099	0.50	Pass
29	0.006	0.078	8.2	0.006	0.116	5.50	Pass
30	0.000	0.061	0.0	0.000	0.092	0.54	Pass
31	0.006	0.073	7.7	0.006	0.109	5.15	Pass
32	0.000	0.058	0.0	0.000	0.086	0.55	Pass
33	0.005	0.068	7.4	0.005	0.102	4.97	Pass
34	0.000	0.054	0.0	0.000	0.081	0.57	Pass
35	0.000	0.064	0.0	0.005	0.096	4.84	Pass
36	0.000	0.051	0.0	0.000	0.077	0.56	Pass
37	0.000	0.061	0.0	0.004	0.091	4.75	Pass
38	0.000	0.048	0.0	0.000	0.073	0.57	Pass
39	0.000	0.058	0.0	0.004	0.087	4.65	Pass
40	0.000	0.046	0.0	0.000	0.069	0.44	Pass

1. Dynamic limits were applied for this test. The highest harmonics values in the above table may not occur at the same window as the maximum harmonics/limit ratio.
2. According to EN61000-3-2 paragraph 7 the note 1 and 2 are valid for all applications having an active input power >75W. Others the result should be pass.

7.7. Test Photograph

Test Mode: Mode 1: Communication by WLAN

Description: Harmonic Current Emission Test Setup




8. Voltage Fluctuation and Flicker

8.1. Test Specification

According to EMC Standard: EN 61000-3-3

8.2. Test Setup

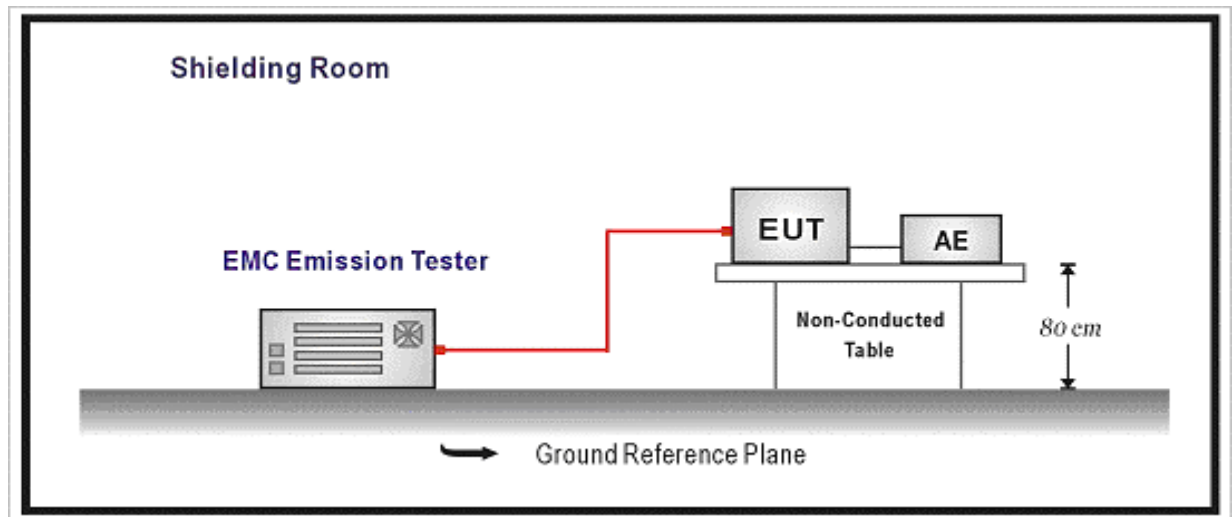

8.3. Limit

The following limits apply:

- the value of P_{st} shall not be greater than 1.0;
 - the value of P_{1t} shall not be greater than 0.65;
 - the value of $d(t)$ during a voltage change shall not exceed 3.3 % for more than 500 ms;
 - the relative steady-state voltage change, d_c , shall not exceed 3.3 %;
 - the maximum relative voltage change, d_{max} , shall not exceed;
- a) 4 % without additional conditions;
 - b) 6 % for equipment which is:
 - switched manually, or
 - switched automatically more frequently than twice per day, and also has either a delayed restart (the delay being not less than a few tens of seconds), or manual restart, after a power supply interruption.

Note: The cycling frequency will be further limited by the P_{st} and P_{1t} limit.

For example: a d_{max} of 6% producing a rectangular voltage change characteristic twice per hour will give a P_{1t} of about 0.65.

- c) 7 % for equipment which is:
 - attended whilst in use (for example: hair dryers, vacuum cleaners, kitchen equipment such as mixers, garden equipment such as lawn mowers, portable tools such as electric drills), or
 - switched on automatically, or is intended to be switched on manually, no more than twice per day, and also has either a delayed restart (the delay being not less than a few tens of seconds) or manual restart, after a power supply interruption.

P_{st} and P_{1t} requirements shall not be applied to voltage changes caused by manual switching.

8.4. Test Procedure

The EUT is supplied in series with power analyzer from a power source having the same normal voltage and frequency as the rated supply voltage and the equipment under test. And the rated voltage at the supply voltage of EUT of 0.94 times and 1.06 times shall be performed.

8.5. Deviation from Test Standard

No deviation.

8.6. Test Result


Product	WIRELESS-A/N 26DBM NETWORK MINI PCI ADAPTER
Test Item	Voltage Fluctuation and Flicker
Test Mode	Mode 1: Communication by WLAN
Date of Test	2008/11/10
Test Site	SR-1

Test Result: Pass


Status: Test Completed

Pst and limit line

European Limits

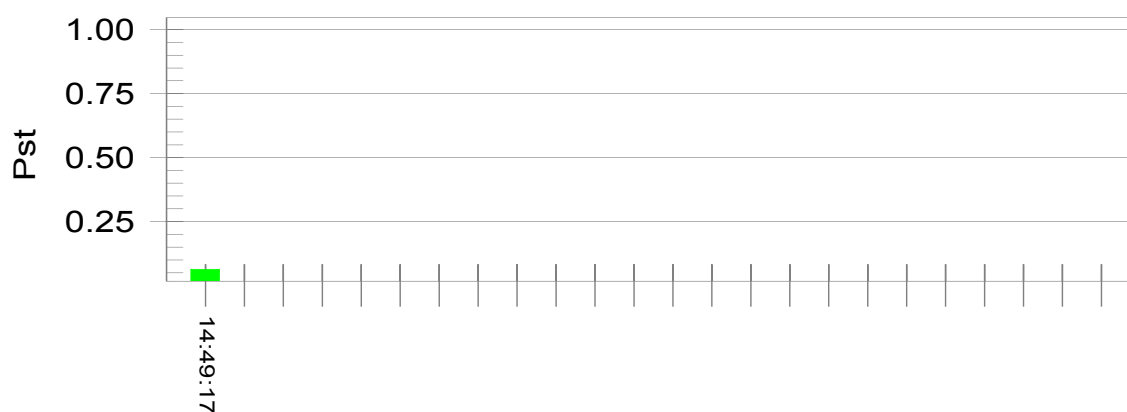

Plt and limit line

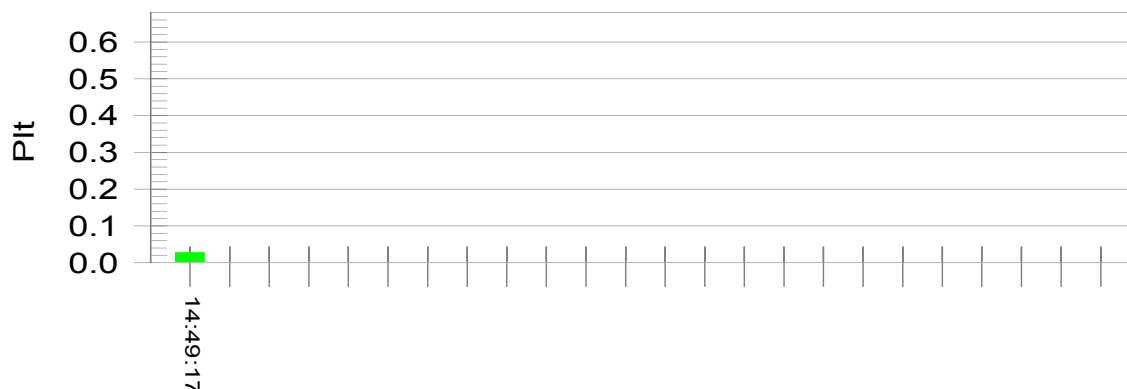

Parameter values recorded during the test:

Vrms at the end of test (Volt):	229.99			
Highest dt (%):	0.00	Test limit (%):	3.30	Pass
Time(mS) > dt:	0.0	Test limit (mS):	0.0	Pass
Highest dc (%):	0.00	Test limit (%):	3.30	Pass
Highest dmax (%):	0.00	Test limit (%):	4.00	Pass
Highest Pst (10 min. period):	0.064	Test limit:	1.000	Pass
Highest Plt (2 hr. period):	0.028	Test limit:	0.650	Pass

8.7. Test Photograph

Test Mode : Mode 1: Communication by WLAN

Description : Voltage Fluctuation and Flicker Test Setup




9. Electrostatic Discharge

9.1. Test Specification

According to Standard: EN 61000-4-2

9.2. Test Setup

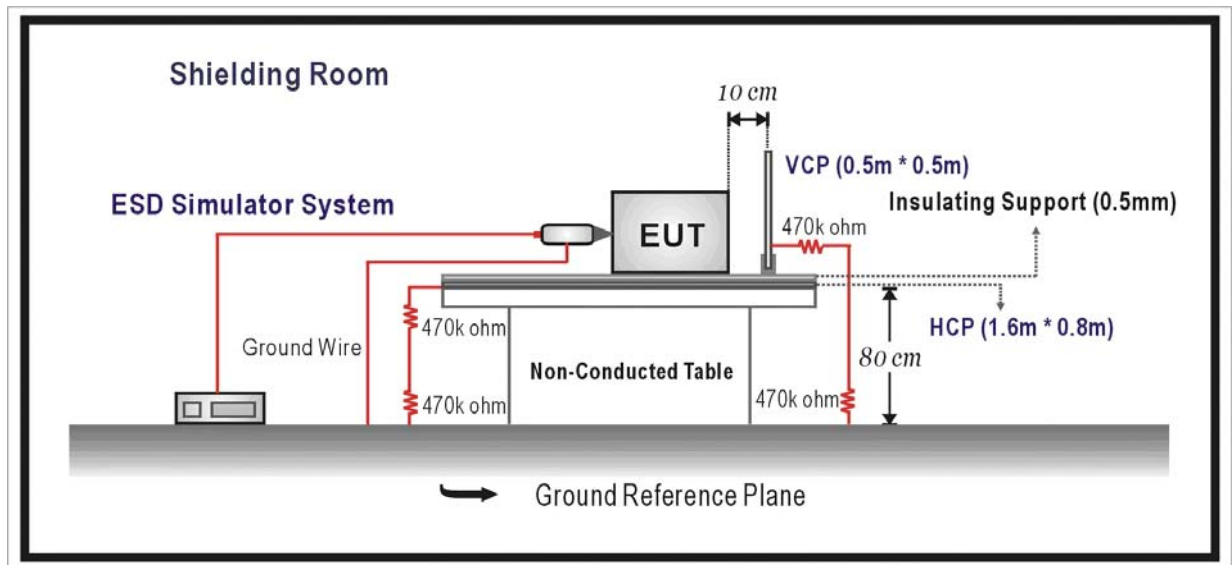

9.3. Limit

Item	Environmental Phenomena	Units	Test Specification	Performance Criteria
Enclosure Port				
	Electrostatic Discharge	kV(Charge Voltage)	±8 Air Discharge ±4 Contact Discharge	B

9.4. Test Procedure

Direct application of discharges to the EUT:

Contact discharge was applied only to conductive surfaces of the EUT.

Air discharges were applied only to non-conductive surfaces of the EUT.

During the test, it was performed with single discharges. For the single discharge time between successive single discharges will be keep longer 1 second. It was at least ten single discharges with positive and negative at the same selected point.

The selected point, which was performed with electrostatic discharge, was marked on the red label of the EUT.

Indirect application of discharges to the EUT:

Vertical Coupling Plane (VCP):

The coupling plane, of dimensions 0.5m x 0.5m, is placed parallel to, and positioned at a distance 0.1m from, the EUT, with the Discharge Electrode touching the coupling plane.

The four faces of the EUT will be performed with electrostatic discharge. It was at least ten single discharges with positive and negative at the same selected point.

Horizontal Coupling Plane (HCP):

The coupling plane is placed under to the EUT. The generator shall be positioned vertically at a distance of 0.1m from the EUT, with the Discharge Electrode touching the coupling plane.

The four faces of the EUT will be performed with electrostatic discharge. It was at least ten single discharges with positive and negative at the same selected point.

9.5. Deviation from Test Standard

No deviation.

9.6. Test Result

Product	WIRELESS-A/N 26DBM NETWORK MINI PCI ADAPTER
Test Item	Electrostatic Discharge
Test Mode	Mode 1: Communication by WLAN
Date of Test	2008/11/14
Test Site	SR-3

Item	Amount of Discharge	Voltage (kV)	Required Criteria	Complied to Criteria	Results
Air Discharge	N/A	N/A	N/A	N/A	N/A
Contact Discharge	N/A	N/A	N/A	N/A	N/A
Indirect Discharge (HCP)	200	±2, 4	B	A	Pass
Indirect Discharge (VCP Front)	50	±2, 4	B	A	Pass
Indirect Discharge (VCP Left)	50	±2, 4	B	A	Pass
Indirect Discharge (VCP Back)	50	±2, 4	B	A	Pass
Indirect Discharge (VCP Right)	50	±2, 4	B	A	Pass

- ☒ Meet criteria A: Operate as intended during and after the test
☐ Meet criteria B: Operate as intended after the test
☐ Meet criteria C: Loss/Error of function
☒ Additional Information
☐ EUT stopped operation and could / could not be reset by operator at _____ kV.
☒ No false alarms or other malfunctions were observed during or after the test.

Product	WIRELESS-A/N 26DBM NETWORK MINI PCI ADAPTER
Test Item	Electrostatic Discharge
Test Mode	Mode 2: Standby
Date of Test	2008/11/14
Test Site	SR-3

Item	Amount of Discharge	Voltage (kV)	Required Criteria	Complied to Criteria	Results
Air Discharge	N/A	N/A	N/A	N/A	N/A
Contact Discharge	N/A	N/A	N/A	N/A	N/A
Indirect Discharge (HCP)	200	±2, 4	B	A	Pass
Indirect Discharge (VCP Front)	50	±2, 4	B	A	Pass
Indirect Discharge (VCP Left)	50	±2, 4	B	A	Pass
Indirect Discharge (VCP Back)	50	±2, 4	B	A	Pass
Indirect Discharge (VCP Right)	50	±2, 4	B	A	Pass

- ☒ Meet criteria A: Operate as intended during and after the test
☐ Meet criteria B: Operate as intended after the test
☐ Meet criteria C: Loss/Error of function
☒ Additional Information
☐ EUT stopped operation and could / could not be reset by operator at _____ kV.
☒ No false alarms or other malfunctions were observed during or after the test.

9.7. Test Photograph

Test Mode: Mode 1: Communication by WLAN

Description: Electrostatic Discharge Test Setup



Test Mode: Mode 2: Standby

Description: Electrostatic Discharge Test Setup




10. RF Electromagnetic Field

10.1. Test Specification

According to Standard: EN 61000-4-3

10.2. Test Setup

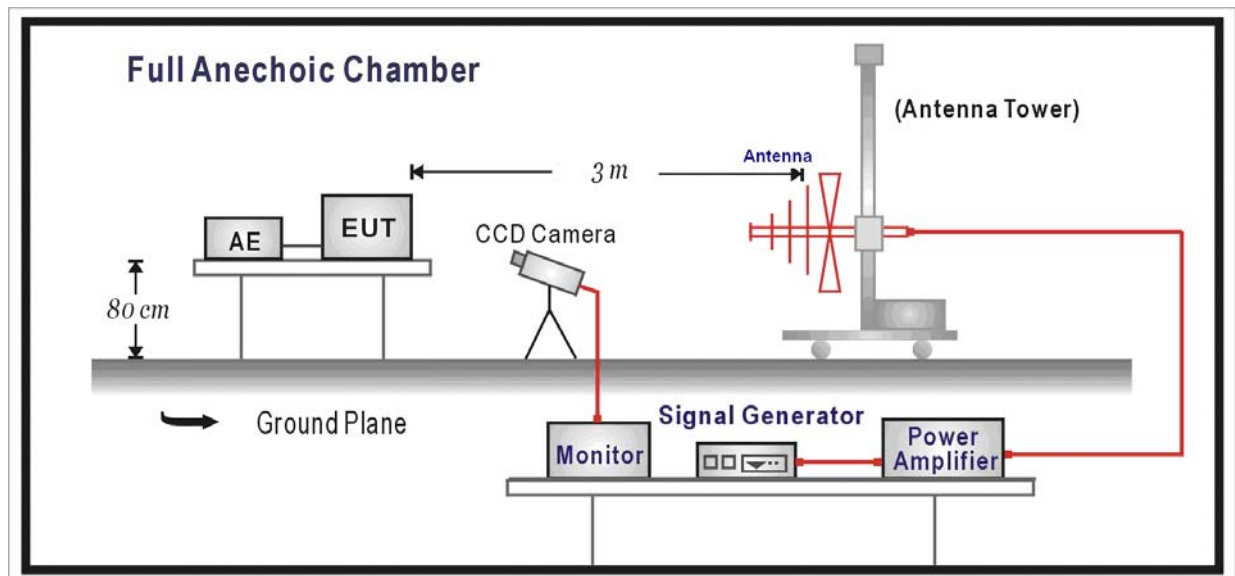

10.3. Limit

Item	Environmental Phenomena	Units	Test Specification	Performance Criteria
Enclosure Port (See Note)				
	Radio-Frequency	MHz	80-1000, 1400-2000	A
	Electromagnetic Field	V/m(Un-modulated, rms)	3	
	Amplitude Modulated	% AM (1kHz)	80	

10.4. Test Procedure

The EUT and load, which are placed on a table that is 0.8 meter above ground, are placed with one coincident with the calibration plane such that the distance from antenna to the EUT was 3 meters.

Both horizontal and vertical polarization of the antenna and four sides of the EUT are set on measurement.

In order to judge the EUT performance, a CCD camera is used to monitor EUT screen.

All the scanning conditions are as follows:

Condition of Test	Remarks
1. Field Strength	3 V/m Level 2
2. Radiated Signal	AM 80% Modulated with 1kHz
3. Scanning Frequency	80 - 1000MHz, 1400 – 2000MHz
4. Dwell Time	3 Seconds
5. Frequency step size Δf	1%
6. The rate of Swept of Frequency	1.5×10^{-3} decades/s

10.5. Deviation from Test Standard

No deviation.

10.6. Test Result

Product	WIRELESS-A/N 26DBM NETWORK MINI PCI ADAPTER
Test Item	RF Electromagnetic Field
Test Mode	Mode 1: Communication by WLAN
Date of Test	2008/11/14
Test Site	AC-4

Frequency (MHz)	Position (Angle)	Polarity (H or V)	Field Strength (V/m)	Required Criteria	Complied to Criteria	Results
80-1000 1400-2000	Front	H	3	A	A	Pass
80-1000 1400-2000	Front	V	3	A	A	Pass
80-1000 1400-2000	Back	H	3	A	A	Pass
80-1000 1400-2000	Back	V	3	A	A	Pass
80-1000 1400-2000	Right	H	3	A	A	Pass
80-1000 1400-2000	Right	V	3	A	A	Pass
80-1000 1400-2000	Left	H	3	A	A	Pass
80-1000 1400-2000	Left	V	3	A	A	Pass

- ☒ Meet criteria A: Operate as intended during and after the test
☐ Meet criteria B: Operate as intended after the test
☐ Meet criteria C: Loss/Error of function
☒ Additional Information
 ☐ EUT stopped operation and could / could not be reset by operator at _____ V/m, at frequency _____ MHz.
☒ No false alarms or other malfunctions were observed during or after the test.

Product	WIRELESS-A/N 26DBM NETWORK MINI PCI ADAPTER
Test Item	RF Electromagnetic Field
Test Mode	Mode 2: Standby
Date of Test	2008/11/14
Test Site	AC-4


Frequency (MHz)	Position (Angle)	Polarity (H or V)	Field Strength (V/m)	Required Criteria	Complied to Criteria	Results
80-1000 1400-2000	Front	H	3	A	A	Pass
80-1000 1400-2000	Front	V	3	A	A	Pass
80-1000 1400-2000	Back	H	3	A	A	Pass
80-1000 1400-2000	Back	V	3	A	A	Pass
80-1000 1400-2000	Right	H	3	A	A	Pass
80-1000 1400-2000	Right	V	3	A	A	Pass
80-1000 1400-2000	Left	H	3	A	A	Pass
80-1000 1400-2000	Left	V	3	A	A	Pass

- ☒ Meet criteria A: Operate as intended during and after the test
☐ Meet criteria B: Operate as intended after the test
☐ Meet criteria C: Loss/Error of function
☒ Additional Information
 ☐ EUT stopped operation and could / could not be reset by operator at _____V/m, at frequency _____MHz.
 ☒ No false alarms or other malfunctions were observed during or after the test.

10.7. Test Photograph


Test Mode: Mode 1: Communication by WLAN

Description: RF Electromagnetic Field Test Setup

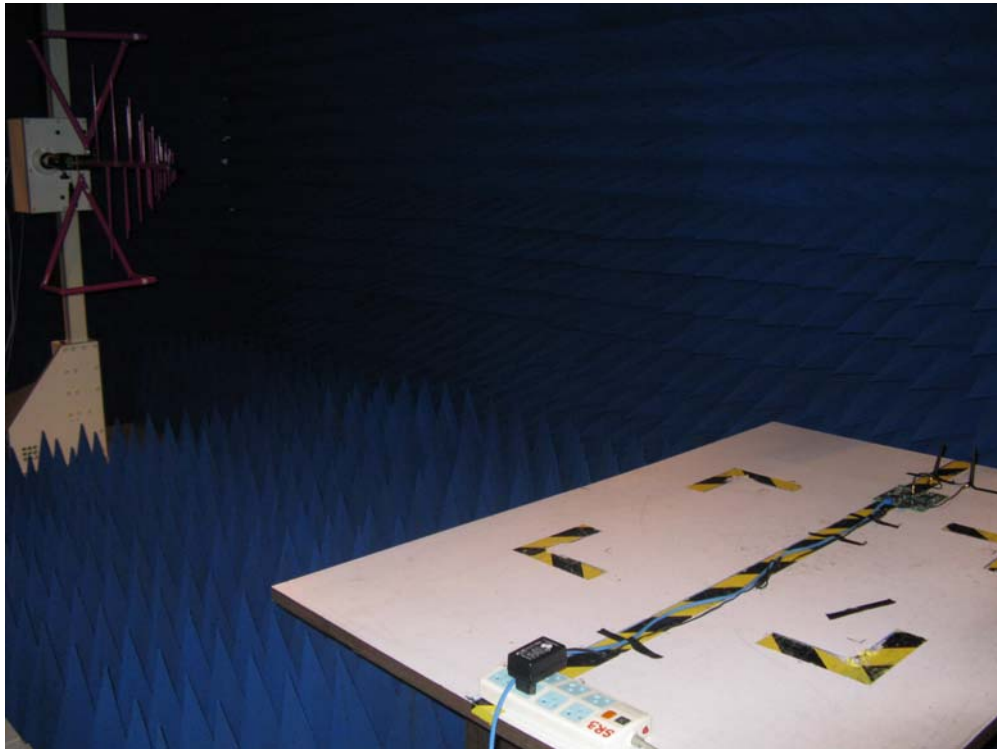

Test Mode: Mode 2: Standby

Description: RF Electromagnetic Field Test Setup

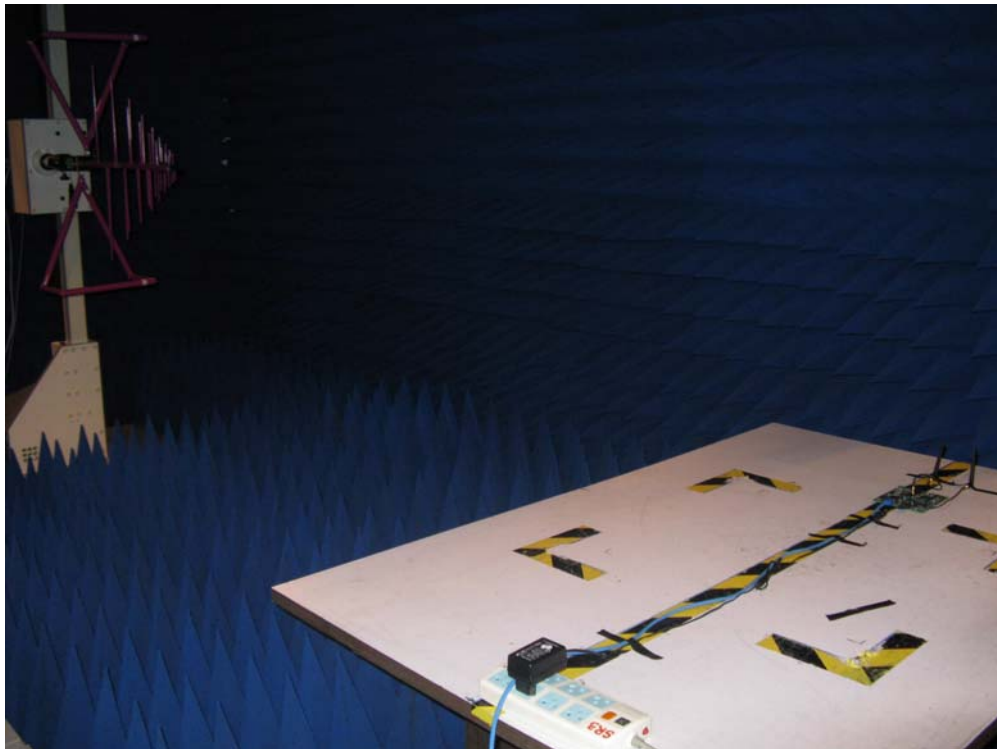


11. Fast Transients Common Mode

11.1. Test Specification

According to Standard: EN 61000-4-4

11.2. Test Setup

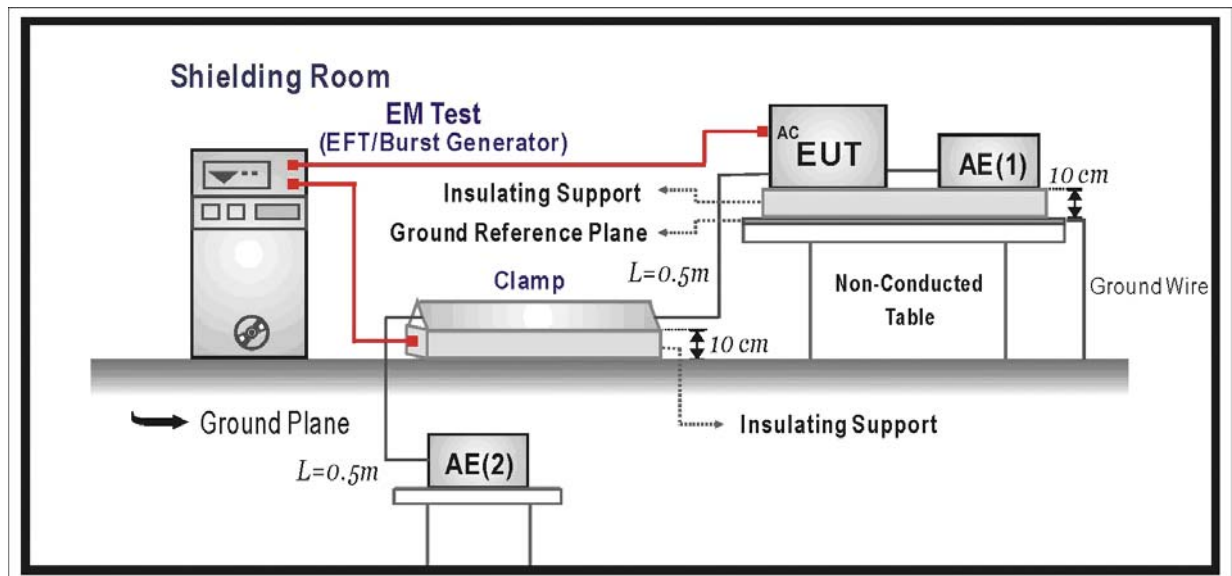

11.3. Limit

Item	Environmental Phenomena	Units	Test Specification	Performance Criteria
Signal Ports and Telecommunication Ports (See Note)				
	Fast Transients Common Mode	kV (Peak) Tr/Th ns Rep. Frequency kHz	+0.5 5/50 5	B
Input D.C. Power Ports				
	Fast Transients Common Mode	kV (Peak) Tr/Th ns Rep. Frequency kHz	+0.5 5/50 5	B
Input A.C. Power Ports				
	Fast Transients Common Mode	kV (Peak) Tr/Th ns Rep. Frequency kHz	+1 5/50 5	B

Note: Applicable only to cables which according to the manufacturer's specification supports communication on cable lengths greater than 3m.

11.4. Test Procedure

The EUT is placed on a table that is 0.8 meter height. A ground reference plane is placed on the table, and uses a 0.1m insulation between the EUT and ground reference plane.

The minimum area of the ground reference plane is 1m*1m, and 0.65mm thick min, and projected beyond the EUT by at least 0.1m on all sides.

For signal and telecommunication ports:

The EFT interference signal is through a coupling clamp device couples to the signal and control lines of the EUT with burst noise for 1minute.

For input A.C. and D.C. power ports:

The EUT is connected to the power mains through a coupling device that directly couples the EFT/B interference signal.

Each of the Line and Neutral conductors is impressed with burst noise for 1 minute.

The length of the signal and power lines between the coupling device and the EUT is 0.5m.

11.5. Deviation from Test Standard

No deviation.

11.6. Test Result

Product	WIRELESS-A/N 26DBM NETWORK MINI PCI ADAPTER
Test Item	Fast Transients Common Mode
Test Mode	Mode 1: Communication by WLAN
Date of Test	2008/11/14
Test Site	SR-2

Inject Line	Polarity	Voltage (kV)	Inject Time (Second)	Inject Method	Required Criteria	Complied to Criteria	Result
L+N	±	1	60	Direct	B	A	Pass
LAN	±	0.5	60	Clamp	B	A	Pass

- ☒ Meet criteria A: Operate as intended during and after the test
☐ Meet criteria B: Operate as intended after the test
☐ Meet criteria C: Loss/Error of function
☒ Additional Information
- ☐ EUT stopped operation and could / could not be reset by operator at _____ kV of Line _____.
☒ No false alarms or other malfunctions were observed during or after the test.

Product	WIRELESS-A/N 26DBM NETWORK MINI PCI ADAPTER
Test Item	Fast Transients Common Mode
Test Mode	Mode 2: Standby
Date of Test	2008/11/14
Test Site	SR-2

Inject Line	Polarity	Voltage (kV)	Inject Time (Second)	Inject Method	Required Criteria	Complied to Criteria	Result
L+N	±	1	60	Direct	B	A	Pass
LAN	±	0.5	60	Clamp	B	A	Pass

- ☒ Meet criteria A: Operate as intended during and after the test
☐ Meet criteria B: Operate as intended after the test
☐ Meet criteria C: Loss/Error of function
☒ Additional Information
☐ EUT stopped operation and could / could not be reset by operator at _____kV of Line_____.
☒ No false alarms or other malfunctions were observed during or after the test.

11.7. Test Photograph

Test Mode: Mode 1: Communication by WLAN

Description: Fast Transients Common Mode Test Setup for Main



Test Mode: Mode 1: Communication by WLAN

Description: Fast Transients Common Mode Test Setup for LAN



Test Mode: Mode 2: Standby

Description: Fast Transients Common Mode Test Setup for Main



Test Mode: Mode 2: Standby

Description: Fast Transients Common Mode Test Setup for LAN




12. Surges

12.1. Test Specification

According to Standard: EN 61000-4-5

12.2. Test Setup

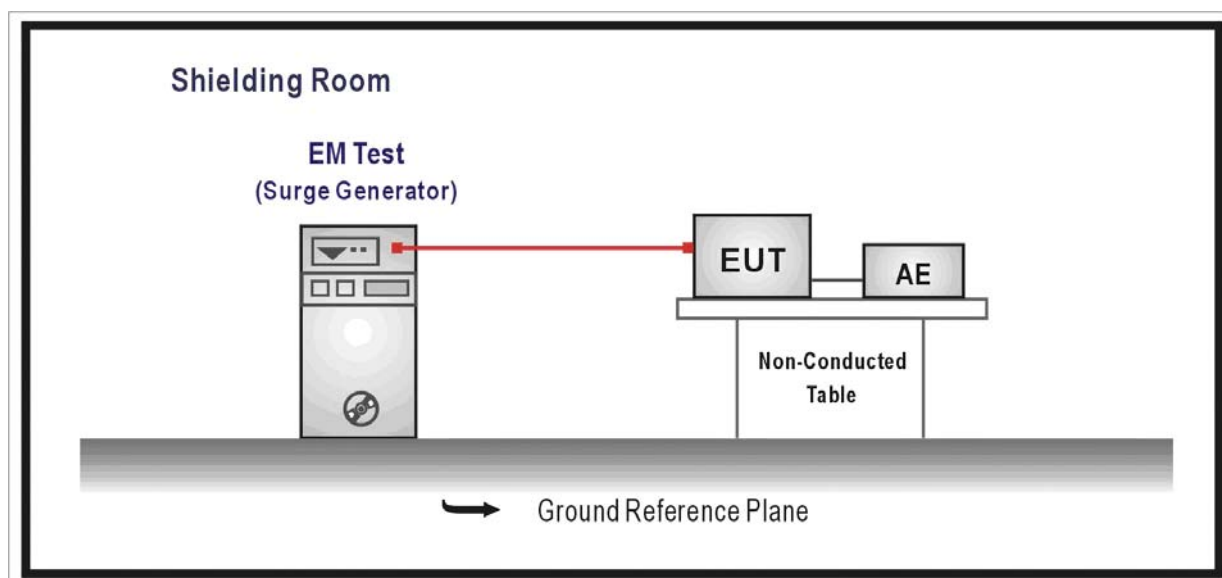

12.3. Limit

Item	Environmental Phenomena	Units	Test Specification	Performance Criteria
Telecommunication ports directly connected to outdoor cables				
Surges	Line to Ground	Tr/Th us kV	1.2/50 (8/20) ± 1	B
Telecommunication ports directly connected to indoor cables (See Note(2))				
Surges	Line to Ground	Tr/Th us kV	1.2/50 (8/20) ± 0.5	B
AC Power Ports (See Note(3))				
Surges	Line to Line	Tr/Th us kV	1.2/50 (8/20) ± 1	B
	Line to Ground	kV	± 2	

Note 1: Where normal functioning cannot be achieved because of the impact of the CDN on the EUT, no immunity test shall be required.

Note 2: In telecommunications centers 0.5 kV line to ground shall be used.

Note 3: In telecom centers 1 kV line to ground and 0.5 kV line to line shall be used.

12.4. Test Procedure

The EUT and its load are placed on a table that is 0.8 meter above a metal ground plane measured 1m*1m min. and 0.65mm thick min. And projected beyond the EUT by at least 0.1m on all sides. The length of power cord between the coupling device and the EUT shall be 2m or less.

For input A.C. and D.C. power ports:

The EUT is connected to the power mains through a coupling device that directly couples the Surge interference signal.

The surge noise shall be applied synchronized to the voltage phase at 0° , 90° , 180° , 270° and the peak value of the a.c. voltage wave. (Positive and negative)

Each of Line-Earth and Line-Line is impressed with a sequence of five surge voltages with interval of 1 min.

12.5. Deviation from Test Standard

No deviation.

12.6. Test Result

Product	WIRELESS-A/N 26DBM NETWORK MINI PCI ADAPTER
Test Item	Surges
Test Mode	Mode 1: Communication by WLAN
Date of Test	2008/11/14
Test Site	SR-2

Inject Line	Polarity	Angle	Voltage (kV)	Time Interval (Second)	Inject Method	Required Criteria	Complied to Criteria	Result
L-N	±	0	1	60	Direct	B	A	Pass
L-N	±	90	1	60	Direct	B	A	Pass
L-N	±	180	1	60	Direct	B	A	Pass
L-N	±	270	1	60	Direct	B	A	Pass

Note: The testing performed is from lowest level up to the highest level as required by standard, but only highest level is shown on the report.

- ☒ Meet criteria A: Operate as intended during and after the test
- ☐ Meet criteria B: Operate as intended after the test
- ☐ Meet criteria C: Loss/Error of function
- ☒ Additional Information
 - ☐ EUT stopped operation and could / could not be reset by operator at _____ kV of Line _____.
 - ☒ No false alarms or other malfunctions were observed during or after the test.

Product	WIRELESS-A/N 26DBM NETWORK MINI PCI ADAPTER
Test Item	Surges
Test Mode	Mode 2: Standby
Date of Test	2008/11/14
Test Site	SR-2

Inject Line	Polarity	Angle	Voltage (kV)	Time Interval (Second)	Inject Method	Required Criteria	Complied to Criteria	Result
L-N	±	0	1	60	Direct	B	A	Pass
L-N	±	90	1	60	Direct	B	A	Pass
L-N	±	180	1	60	Direct	B	A	Pass
L-N	±	270	1	60	Direct	B	A	Pass

Note: The testing performed is from lowest level up to the highest level as required by standard, but only highest level is shown on the report.

- ☒ Meet criteria A: Operate as intended during and after the test
- ☐ Meet criteria B: Operate as intended after the test
- ☐ Meet criteria C: Loss/Error of function
- ☒ Additional Information
 - ☐ EUT stopped operation and could / could not be reset by operator at _____ kV of Line_____.
 - ☒ No false alarms or other malfunctions were observed during or after the test.

12.7. Test Photograph

Test Mode: Mode 1: Communication by WLAN

Description: Surges Test Setup for Main



Test Mode: Mode 2: Standby

Description: Surges Test Setup for Main




13. RF Common Mode

13.1. Test Specification


According to Standard: EN 61000-4-6

13.2. Test Setup

CDN Test Setup

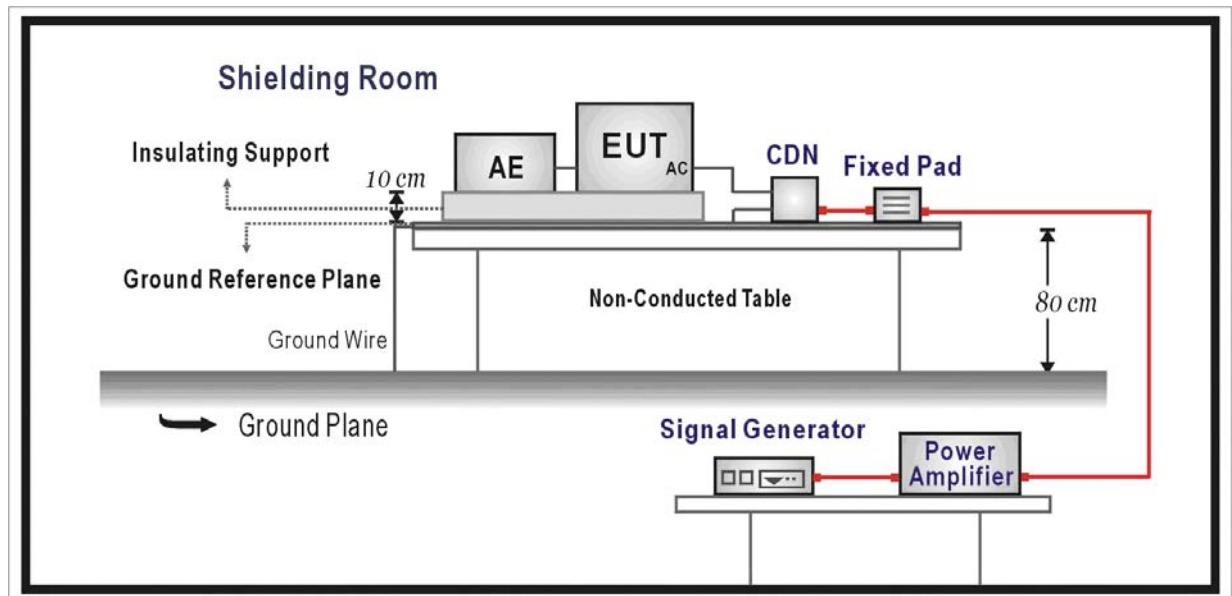

EM Clamp Test Setup

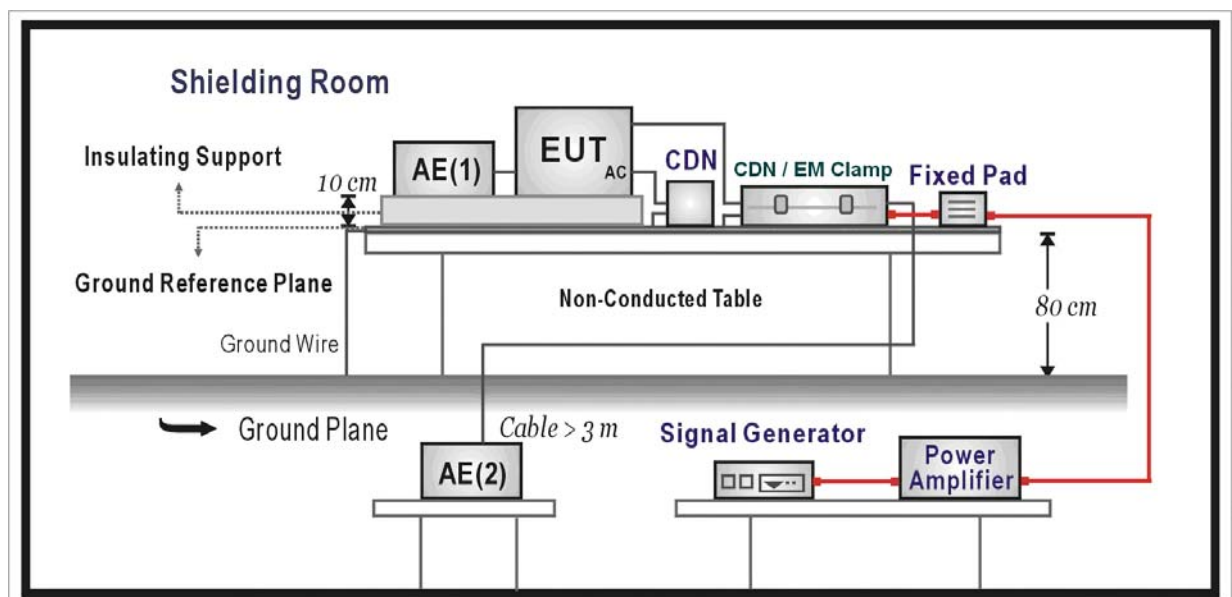

13.3. Limit

Item	Environmental Phenomena	Units	Test Specification	Performance Criteria
Signal Ports, Telecommunication Ports, Control Ports				
	Radio-Frequency Continuous Conducted	MHz V (rms, Un-modulated) % AM (1kHz)	0.15-80 3 80	A
D.C. Power Ports				
	Radio-Frequency Continuous Conducted	MHz V (rms, Un-modulated) % AM (1kHz)	0.15-80 3 80	A
A.C. Power Ports				
	Radio-Frequency Continuous Conducted	MHz V (rms, Un-modulated) % AM (1kHz)	0.15-80 3 80	A

13.4. Test Procedure

The EUT are placed on a table that is 0.8 meter height, and a Ground reference plane on the table, EUT are placed upon table and use a 0.1m insulation between the EUT and Ground reference plane.

For signal ports, telecommunication ports and control ports:

The disturbance signal is through a coupling and decoupling networks (CDN) or EM-clamp device couples to the signal and Telecommunication lines of the EUT.

For input D.C. and A.C. power ports:

The EUT is connected to the power mains through a coupling and decoupling networks for power supply lines. And directly couples the disturbances signal into EUT.

Used CDN-M2 for two wires or CDN-M3 for three wires.

All the scanning conditions are as follows:

Condition of Test	Remarks
1. Field Strength	3V Level 2
2. Radiated Signal	AM 80% Modulated with 1kHz
3. Scanning Frequency	0.15 - 80MHz
4. Dwell Time	3 Seconds
5. Frequency step size Δf	1%
6. The rate of Swept of Frequency	1.5×10^{-3} decades/s

13.5. Deviation from Test Standard

No deviation.

13.6. Test Result

Product	WIRELESS-A/N 26DBM NETWORK MINI PCI ADAPTER
Test Item	RF Common Mode
Test Mode	Mode 1: Communication by WLAN
Date of Test	2008/11/14
Test Site	SR-2

Frequency (MHz)	Voltage (V)	Inject Method	Inject Ports	Required Criteria	Complied to Criteria	Result
0.15-80	3	CDN	AC IN	A	A	Pass
0.15-80	3	CDN	LAN	A	A	Pass

- ☒ Meet criteria A: Operate as intended during and after the test
- ☐ Meet criteria B: Operate as intended after the test
- ☐ Meet criteria C: Loss/Error of function
- ☒ Additional Information
- ☐ EUT stopped operation and could / could not be reset by operator at _____V, at frequency _____MHz.
- ☒ No false alarms or other malfunctions were observed during or after the test.

Product	WIRELESS-A/N 26DBM NETWORK MINI PCI ADAPTER
Test Item	RF Common Mode
Test Mode	Mode 2: Standby
Date of Test	2008/11/14
Test Site	SR-2

Frequency (MHz)	Voltage (V)	Inject Method	Inject Ports	Required Criteria	Complied to Criteria	Result
0.15-80	3	CDN	AC IN	A	A	Pass
0.15-80	3	CDN	LAN	A	A	Pass

- ☒ Meet criteria A: Operate as intended during and after the test
- ☐ Meet criteria B: Operate as intended after the test
- ☐ Meet criteria C: Loss/Error of function
- ☒ Additional Information
- ☐ EUT stopped operation and could / could not be reset by operator at _____V, at frequency _____MHz.
- ☒ No false alarms or other malfunctions were observed during or after the test.

13.7. Test Photograph

Test Mode: Mode 1: Communication by WLAN

Description: RF Common Mode Test Setup for Main



Test Mode: Mode 1: Communication by WLAN

Description: RF Common Mode Test Setup for LAN



Test Mode: Mode 2: Standby

Description: RF Common Mode Test Setup for Main



Test Mode: Mode 2: Standby

Description: RF Common Mode Test Setup for LAN




14. Voltage Dips and Interruption

14.1. Test Specification

According to Standard: EN 61000-4-11

14.2. Test Setup

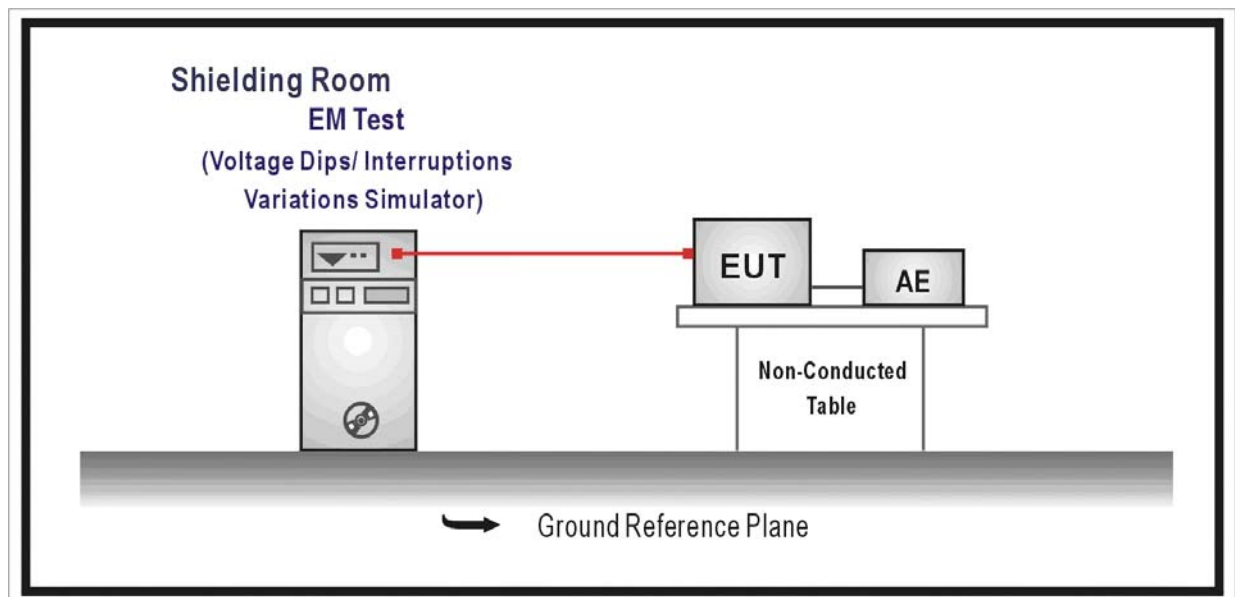

14.3. Limit

Item	Environmental Phenomena	Units	Test Specification	Performance Criteria
Input A.C. Power Ports				
Voltage Dips		% Reduction	30	C
		ms	10	
		% Reduction	60	B
		ms	100	
Voltage Interruptions		% Reduction	>95	C
		ms	5000	

14.4. Test Procedure

The EUT and its load are placed on a table which is 0.8 meter above a metal ground plane measured 1m*1m min. And 0.65mm thick min. And projected beyond the EUT by at least 0.1m on all sides. The power cord shall be used the shortest power cord as specified by the manufacturer.

For Voltage Dips/ Interruptions test:

The selection of test voltage is based on the rated power range. If the operation range is large than 20% of lower power range, both end of specified voltage shall be tested. Otherwise, the typical voltage specification is selected as test voltage.

The EUT is connected to the power mains through a coupling device that directly couples to the Voltage Dips and Interruption Generator.

Voltage phase shifting are shall occur at 0° , 45° , 90° , 135° , 180° , 225° , 270° , 315° of the voltage.

14.5. Deviation from Test Standard

No deviation.

14.6. Test Result

Product	WIRELESS-A/N 26DBM NETWORK MINI PCI ADAPTER
Test Item	Voltage Dips and Interruption
Test Mode	Mode 1: Communication by WLAN
Date of Test	2008/11/14
Test Site	SR-2

Voltage Dips and Interruption Reduction (%)	Angle	Test Duration (ms)	Required Criteria	Complied to Criteria	Test Result
30(161V)	0	10	B	A	Pass
30(161V)	45	10	B	A	Pass
30(161V)	90	10	B	A	Pass
30(161V)	135	10	B	A	Pass
30(161V)	180	10	B	A	Pass
30(161V)	225	10	B	A	Pass
30(161V)	270	10	B	A	Pass
30(161V)	315	10	B	A	Pass
60(92V)	0	100	C	A	Pass
60(92V)	45	100	C	A	Pass
60(92V)	90	100	C	A	Pass
60(92V)	135	100	C	A	Pass
60(92V)	180	100	C	A	Pass
60(92V)	225	100	C	A	Pass
60(92V)	270	100	C	A	Pass
60(92V)	315	100	C	A	Pass
>95(0V)	0	5000	C	C	Pass
>95(0V)	45	5000	C	C	Pass
>95(0V)	90	5000	C	C	Pass
>95(0V)	135	5000	C	C	Pass
>95(0V)	180	5000	C	C	Pass
>95(0V)	225	5000	C	C	Pass
>95(0V)	270	5000	C	C	Pass
>95(0V)	315	5000	C	C	Pass

- ☒ Meet criteria A: Operate as intended during and after the test
- ☐ Meet criteria B: Operate as intended after the test
- ☒ Meet criteria C: Loss/Error of function
- ☒ Additional Information
 - ☐ EUT stopped operation and could / could not be reset by operator at _____ V,
at _____ angle.
 - ☒ No false alarms or other malfunctions were observed during or after the test.

Product	WIRELESS-A/N 26DBM NETWORK MINI PCI ADAPTER
Test Item	Voltage Dips and Interruption
Test Mode	Mode 2: Standby
Date of Test	2008/11/14
Test Site	SR-2

Voltage Dips and Interruption Reduction (%)	Angle	Test Duration (ms)	Required Criteria	Complied to Criteria	Test Result
30(161V)	0	10	B	A	Pass
30(161V)	45	10	B	A	Pass
30(161V)	90	10	B	A	Pass
30(161V)	135	10	B	A	Pass
30(161V)	180	10	B	A	Pass
30(161V)	225	10	B	A	Pass
30(161V)	270	10	B	A	Pass
30(161V)	315	10	B	A	Pass
60(92V)	0	100	C	A	Pass
60(92V)	45	100	C	A	Pass
60(92V)	90	100	C	A	Pass
60(92V)	135	100	C	A	Pass
60(92V)	180	100	C	A	Pass
60(92V)	225	100	C	A	Pass
60(92V)	270	100	C	A	Pass
60(92V)	315	100	C	A	Pass
>95(0V)	0	5000	C	C	Pass
>95(0V)	45	5000	C	C	Pass
>95(0V)	90	5000	C	C	Pass
>95(0V)	135	5000	C	C	Pass
>95(0V)	180	5000	C	C	Pass
>95(0V)	225	5000	C	C	Pass
>95(0V)	270	5000	C	C	Pass
>95(0V)	315	5000	C	C	Pass

- ☒ Meet criteria A: Operate as intended during and after the test
- ☐ Meet criteria B: Operate as intended after the test
- ☒ Meet criteria C: Loss/Error of function
- ☒ Additional Information
 - ☐ EUT stopped operation and could / could not be reset by operator at _____ V,
at _____ angle.
 - ☒ No false alarms or other malfunctions were observed during or after the test.

14.7. Test Photograph

Test Mode : Mode 1: Communication by WLAN

Description : Voltage Dips and Interruption Test Setup



Test Mode : Mode 2: Standby

Description : Voltage Dips and Interruption Test Setup




15. Transients and surges

15.1. Test Specification

According to Standard: ISO 7637-2

15.2. Test Setup

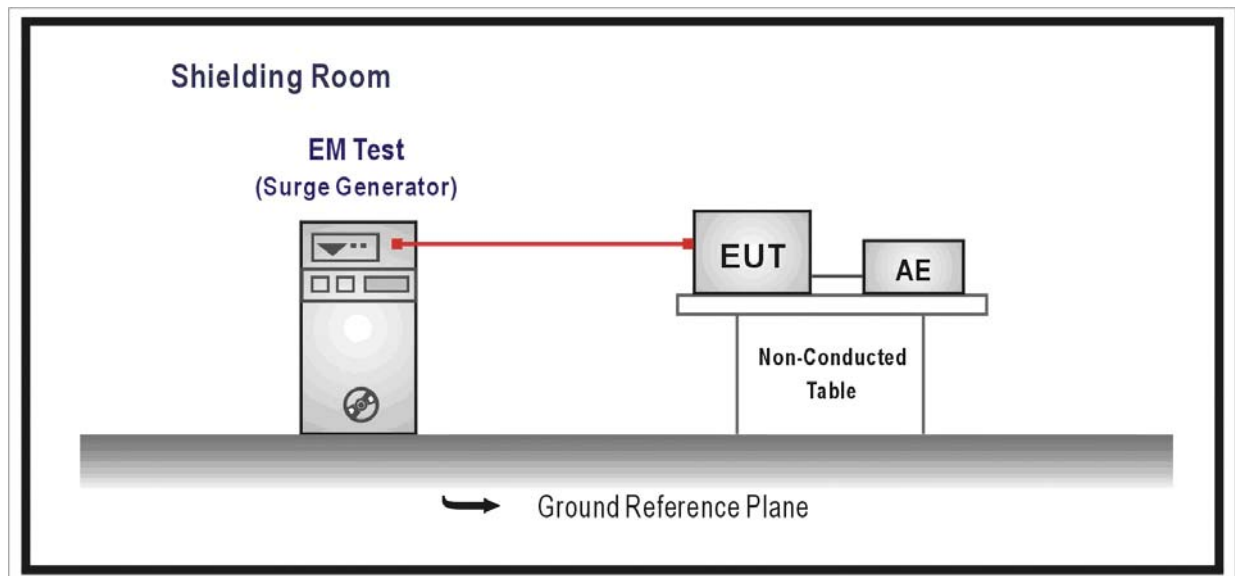

15.3. Limit

EUT applying pulses 1, 2a, 2b, 3a, 3b, and 4, using immunity test level III. For the purpose of EMC testing it is sufficient to apply pulses 1, 2a and 4, 10 times each, and apply the test pulses 3a and 3b for 20 minutes each.

15.4. Test Procedure

Test requirements for 12 V DC powered equipment:

Where the manufacturer in his installation documentation requires the radio equipment to have a direct connection to the 12 V main vehicle battery the requirements in a) shall apply.

Where the manufacturer does not require the radio equipment to have a direct connection to the 12 V main vehicle battery the requirements in a) and b) shall apply:

Pulse 3a and 3b, level II, with the test time reduced to 5 min for each;

Pulse 4, level II, 5 pulses, with the characteristics as follows:

$V_s = -5\text{ V}$; $V_a = -2.5\text{ V}$; $t_6 = 25\text{ ms}$; $t_7 = 50\text{ ms}$; $t_8 = 5\text{ s}$; $t_f = 5\text{ ms}$; pulse cycle time: 60 s

Pulse, level II: $t_1 = 2.5\text{ s}$; 10 pulses;

Pulse 2, level II: $t_1 = 2.5\text{ s}$; 10 pulses;

Pulse 7, 5 pulses.

Where the manufacturer declares that the radio equipment requires a direct connection to the main vehicle battery, and therefore the tests in accordance with the requirements b) are not carried out, this shall be stated in the test report.

Test requirements for 24 V DC powered equipment:

Where the manufacturer in his installation documentation requires the radio equipment to have a direct connection to the 24 V main vehicle battery the requirements in c) shall apply.

Where the manufacturer does not require the radio equipment to have a direct connection to the 24 V main vehicle battery the requirements in c) and d) shall apply:

c) Pulse 3a and 3b, level II, with the test time reduced to 5 min for each;

Pulse 4, level II, 5 pulses, with the characteristics as follows:

$V_s = -10\text{ V}$; $V_a = -5\text{ V}$; $t_6 = 25\text{ ms}$; $t_7 = 50\text{ ms}$; $t_8 = 5\text{ s}$; $t_f = 10\text{ ms}$; pulse cycle time: 60 s

d) Pulse 1a, level II: $t_1 = 2.5\text{ s}$; $R_i = 25\ \Omega$; 10 pulses;

Pulse 2b, level II: $t_1 = 2.5\text{ s}$; $R_i = 100\ \Omega$; 10 pulses;

Pulse 2, 10 pulses.

Where the manufacturer declares that the radio equipment requires a direct connection to the main vehicle battery, and therefore the tests in accordance with the requirements d) are not carried out, this shall be stated in the test report.

Radio and ancillary equipment designed to operate at both DC power voltages shall be tested in both configurations.

15.5. Deviation from Test Standard

No deviation.

15.6. Test Result

The EUT is not used for vehicular, so the test item is not necessary performed.


16. Attachment

➤ EUT Photograph


(1) EUT Photo



(2) EUT Photo

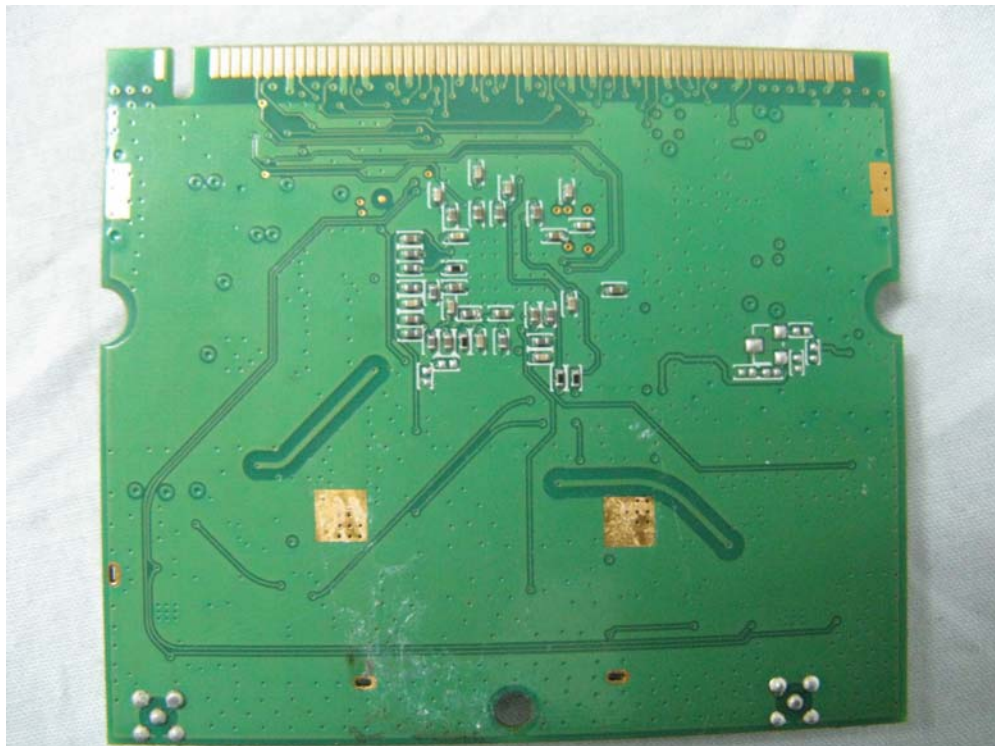

(3) EUT Photo

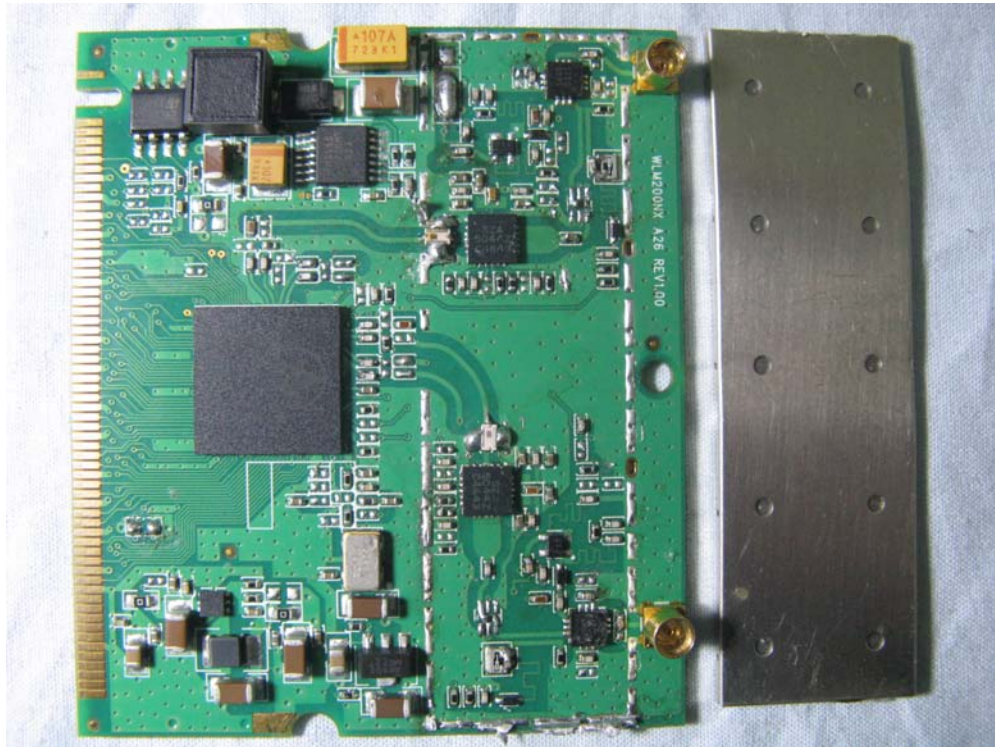

(4) EUT Photo

